



ALWAYS ON

**POWER SOLUTIONS
GENERAL PRODUCT CATALOGUE**

2021



BW POWER SYSTEMS

DC SOLUTIONS INDEX

SPS LOW POWER DC	5
■ 19" & 21" RECTIFIERS	5
IMS MEDIUM POWER DC	6
■ IMS 48	6
HPS HIGH POWER DC	7
■ HPS 48	7
OFF-GRID SOLUTIONS	8
■ HYBRID-CUBE	8
■ SOLAR-CUBE	9
DISTRIBUTION CABINETS	10
■ INDOOR DISTRIBUTION CABINETS	10
■ OUTDOOR DISTRIBUTION CABINETS	11
DA/DC INVERTERS	12
■ TSI INVERTERS	12
■ ALPHATRAN INVERTERS	12
OTHER SOLUTIONS	13
■ DC/DC CONVERTERS	13
■ SINGLE RECTIFIER	13



19" & 21" RECTIFIERS

The Slimline Power System provides advanced controller features in a compact, cost-efficient footprint. The SPS platform is based around a 1RU shelf configuration with an array of combinations of rectifier shelves and distribution options to address 500W to 19200W applications. The Pulsar Edge controller has Ethernet connectivity to facilitate remote network management to monitor and control rectifiers, batteries, and distribution. The SPS is a full featured and reliable DC power solution where system height and depth are restricted, but large system performance is critical to success.

1RU TECHNICAL INFORMATION

- Independent system for integration in 19" rack.
- 2 1000W EP100 rectifier modules. Up to 2kW
- Battery protection, monitoring and control (Shunt, LVBD) Pulsar IP controller, integrated distribution.



6RU TECHNICAL INFORMATION

- Independent system for integration in 19" rack.
- 6 1000W EP100 rectifier modules. Up to 6kW
- Battery protection, monitoring and control (Shunt, LVBD) Pulsar IP controller, integrated distribution.



IMS 48

The IMS 48 is a 48Vdc DC power system for mid-range power requirements. The modular equipment allows 200, 400 and 600A dc configurations, up to 40 distribution positions in CB DIN/FH system and up to 4 sections of frontal access batteries.

The final configuration of the system can be adapted to the needs of each site using standard production, distribution and battery modules.

■ 10U CONFIG ■

■ 20U CONFIG ■

■ 43U CONFIG ■



TECHNICAL INFORMATION

- Modular DC plant for INDOOR installations. 600x600 Cabinets with different height options 10U, 20U, 43U.
- High efficiency (>97%) 3kW CP2725 Rectifiers.
- 200A dc, 400A dc, 600A dc system capacity options.
- Standard components for modular and flexible configurations.
- Battery connection, monitoring and protection (LVBD, Shunt controller).
- Internal battery bank or external battery bank options.
- Sophisticated system controller with IP capability supporting SNMP V3.1/MODBUS/ETHERNET.
- Frontal access for installation and maintenance.

▼▼ [IMS 48 Data-Sheet DOWNLOAD](#) ▼▼
 ▼▼ [CP 2725 Data-Sheet DOWNLOAD](#) ▼▼

HPS 48

The HPS 48 is a distributed architecture DC-48VDC power system for high power requirements. The modular equipment allows configurations from 800 to 48000A (261kW) with different options for distribution in both CB DIN and NH fuses.

The equipment can manage and monitor up to 12 battery sections and 96 3kW rectifiers.

The final configuration of the system can be adapted to the needs of each site using standard production, distribution and battery modules.

■ HPS484800 Distributed System ■

TECHNICAL INFORMATION

- Modular DC plant for INDOOR installations.
- Flexible configuration cabinets for 600Adc, 800Adc, 1200Adc and 1600 Adc.
- Plant extensions in distributed configuration of up to 3 cabinets and 96 rectifiers.
- High efficiency (>97%) 3kW CP2725 rectifiers.
- Standard components for modular and flexible configurations.
- Battery connection, monitoring and protection.
- Flexible distribution options to suit site requirements.
- Battery connection, monitoring and protection.
- Sophisticated system controller with IP capability supporting SNMP V3.1/ MODBUS/ETHERNET.
- Front access for installation and maintenance.



- ▼▼ [HPS 48 Data-Sheet DOWNLOAD](#) ▼▼
- ▼▼ [CP 2725 Data-Sheet DOWNLOAD](#) ▼▼

HYBRID CUBE

The main innovation of the Hybrid Cube system is the exclusive use of a DC bus, which eliminates DC/AC and AC/DC conversion losses. The compact design includes a 14kW solar panel, a DC generator (5 kW DC Genset), batteries (Long Life Li-Ion Batteries), a fuel tank and a controller system that integrates the solution and optimizes power generation to reduce maintenance costs.



TECHNICAL INFORMATION

- OUTDOOR Power generation plant stations without AC
- Solar panel up to 14kW
- 5kW Genset DC generator
- Fuel tank of 1440L (for consumption of 1kW it would only need an annual recharge)
- Long-life Li-Ion batteries between 270 and 1280Ah (4300-8200 charge/discharge cycles) or AGM batteries
- Possibility of adding a 1kW wind generator with DC converter
- Controller that optimizes the operation of the system adapting the moments of solar production with the recharge of batteries and the support of the generator.
- Sophisticated system controller with IP capability supporting SNMP V3.1/ MODBUS/ETHERNET
- Total system weight without fuel 1375kg
- OUTDOOR cabinet with IP 67

▼▼ [HYBRID CUBE Data-Sheet DOWNLOAD](#) ▼▼

▼▼ [HYBRID SOLUTIONS Data-Sheet DOWNLOAD](#) ▼▼

SOLAR CUBE

The SolarCube is a low-power outdoor cabinet designed to meet high-performance telecommunications requirements, in hard-to-adapt operating conditions.

The cabinet uses its own energy production for the internal cooling of the system, improving efficiency with double insulating layer technologies in aluminium cabinets and forced ventilation.

The system allows the complete housing of a telecommunication node including the DC equipment and its batteries, maintaining operational conditions and reducing energy consumption by up to 85%.

TECHNICAL INFORMATION

- Telecommunications cabinet for OUTDOOR applications.
- Solar panel for cooling consumption. The solar panels prevent direct radiation by reducing internal temperature surges.
- Self-cooling of the panels with the interior convection outlets
- Self-cooling IP55 cabinet with double-layer aluminium technology
- Interior design with high contact zones to improve the internal cooling of the installed elements
- Designed to house Powerful Equipment, its batteries and all the necessary equipment for a Base Station.
- The station's internal cooling system optimizes energy consumption by up to 85% for 1kW consumption in 24/7 mode.



- ▼▼ [SOLAR CUBE Data-Sheet DOWNLOAD](#) ▼▼
- ▼▼ [SOLAR CUBE 6s Data-Sheet DOWNLOAD](#) ▼▼

INDOOR DC

The DC distribution cabinets are based on a modular design that allows different configurations to adapt the distribution cabinet to the requirements of the energy system.

Using standard DIN protection components (circuit breaker) the different panels are formed and then assembled into the cabinet. Each panel can be independently configured with a multitude of options; status supervision, measurement elements such as Voltmeter Amperemeters (analogue and/or digital) with the possibility of remote supervision in 4/20mA, SNMP, MODBUS, ETHERNET.

There are cabinets with different sizes from 1400 to 2200 in height and widths of 400, 600, 800.

Simple wall panels from 4 distribution positions up to 44. Anchorage system on wall rail with easy installation.

■ Electrical diagram of the status monitoring system ■



TECHNICAL INFORMATION

- DC distribution cabinets in “Frame” format 19”, 23” and wall frames.
- Solid cabinets made of galvanized sheet metal and finished with epoxy insulation. RAL 9005 BLACK.
- Distribution with standard monopolar CB on DIN rail up to 125A. Up to 132 CB DIN positions per cabinet.
- Capacity to distribute up to 4800Adc per cabinet.
- Different height options in 1400, 1600, 1800, 2000, 2200mm cabinets.
- Composition of standard panels in DIN format 200Adc, 400Adc, 600Adc, 800Adc with 22 distribution positions per panel.
- Total accessibility for safe hot swapping.
- Upper and lower cabinet mechanization to allow access to the wiring.
- Schneider Components.
- Voltmeter Amperemeter with 4/20mA analogue or digital connectivity SNMP, Modbus, ETHERNET.
- Status monitoring relay system. NC or NO.
- Up to 6 panels in a 43U cabinet.

▼▼ [INDOOR CABINETS Data-Sheet DOWNLOAD](#) ▼▼

OUTDOOR DC

The outdoor cabinets are manufactured in aluminum with corrosion-free “double wall” or “single wall” technologies. There are different formats of forced and directed convection cooling, A/C or heat exchangers.

The outdoor cabinets have IP65 exterior protection and anti-vandalism systems, the access to the cabinets is frontal and can accommodate any type of system both DC, AC and telecommunications. The cabinets are designed to accommodate batteries.

■ EXTERNAL ■ ◀ Advantages of Double Wall system ▶ ■ INTERNAL ■

TECHNICAL INFORMATION

- Outdoor equipment cabinets IP65
- Corrosion-free aluminum construction
- Half-height, full-height and multi-cabinet configurations
- Single wall and double wall construction options
- Air conditioning, heat exchanger and fan cooling options
- Space for placing power supply equipment and BTS
- Configurable for environmental and site requirements
- Custom DC and AC power solutions
- Connection, monitoring and protection of the battery
- Internal or external battery options
- Sophisticated system controller with IP capability, SNMP, MODBUS, ETHERNET
- Front access for installation and maintenance.
- Vandal-proof multipoint locking mechanisms



▼▼ [OUTDOOR CABINETS Data-Sheet DOWNLOAD](#) ▼▼

INVERTERS

The solutions for DC/AC inverters are divided into 2 options:

INDEPENDENT TSI MODULES of 0.5kVA, 0.75kVA and 1.5kVA. They are DC to AC conversion systems for 48Vdc input and 230-50Vac 50/60Hz output. The systems do not require an external control system.

HIGH POWER MODULAR SYSTEM from 3.5kVa to 21kVA in an N+1 redundant configuration for optimum reliability up to 17.5 kVA This modular scalability makes the system ideal for most applications where future energy growth is anticipated. Built-in bypass.

■ Architectural wiring diagram ■



TSI TECHNICAL INFORMATION

- Systems available in 0.5kVA, 0.75kVA and 1.5kVA
- DC input with a wide input range of 40 to 60Vdc
- Wide Vout range between 156 and 265Vac. Configurable for 220/230/240 in 50 and 60Hz
- 93% efficiency with 99% power factor and less than 3% harmonic distortion

ALPHATRAN TECHNICAL INFORMATION


- NEBS/Telecom industry compliant. 48Vdc input 220/230-50-60Hz. single phase output
- True modular scalability: 3.5 kVA – 21 kVA (3.5 kVA modules)
- Parallel for redundancy or N + 1 capacity
- Secure hot-swappable module exchange technology
- Total front accessibility.
- Ultra-low profile: 21 kVA in 24 U with Clean DC input <30 dBrc
- Precision output voltage regulation: line <1% and integrated static bypass for greater safety LCD Status Display Module
- IP / SNMP monitoring
- International agency certifications (UL, CE,TUV)

▼▼ [TSI Inverter Data-Sheet DOWNLOAD](#) ▼▼

▼▼ [Alphantran Inverter Data-Sheet DOWNLOAD](#) ▼▼

OTHER

The DC-Converters are a full featured and reliable DC power solution where system needs a conversion from 12Vdc-24Vdc-48Vdc to 12Vdc-24Vdc-48Vdc with high efficiency (more than 98%). Electronic technology used by BW is highly efficient, no warming up of the environment, modular solution that can be inserted in parallel and Galvanic isolation.

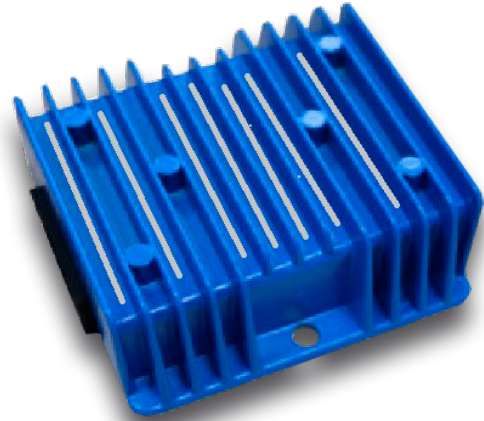

DC/DC CONVERTERS

- 24-48 Vdc dc/dc converters
- 48-24 Vdc dc/dc converters



SINGLE RECTIFIER

- MPR1348FP 48Vdc rectifier that provides efficient isolated power from the AC power grid in a universal format (50-60 Hz, 220-230-240Vac) 1U module that works independently and reports alarms by relay.
- 1350W total power with 92% efficiency



▼▼ [SPS Data-Sheet DOWNLOAD](#)

▼▼ [PULSA EDGE Data-Sheet DOWNLOAD](#)

▼▼

▼▼

▼▼ [MPR1348FP Data-Sheet DOWNLOAD](#)

▼▼ [EP1000 Data-Sheet DOWNLOAD](#)

▼▼

▼▼

 **BW** ALWAYS ON



AC SOLUTIONS

UNINTERRUPTIBLE POWER SUPPLIES
ELSIST UPS SERIES

CATALOG 2021




BW DESIGNS AND DEVELOPS

BW designs and develops high technology products for power electronics market and is leader in designing uninterruptible power supplies.

BW offers a wide range of products based on state-of-art technology.

The main configuration of the systems is based on the control of input sinusoidal waveform, allowing the reduction of input harmonic distortion (THDi) below 3%, with an efficiency higher than 95% in normal operation and higher than 98% in Power-Save condition.

BW also develops custom solutions suitable for special applications.

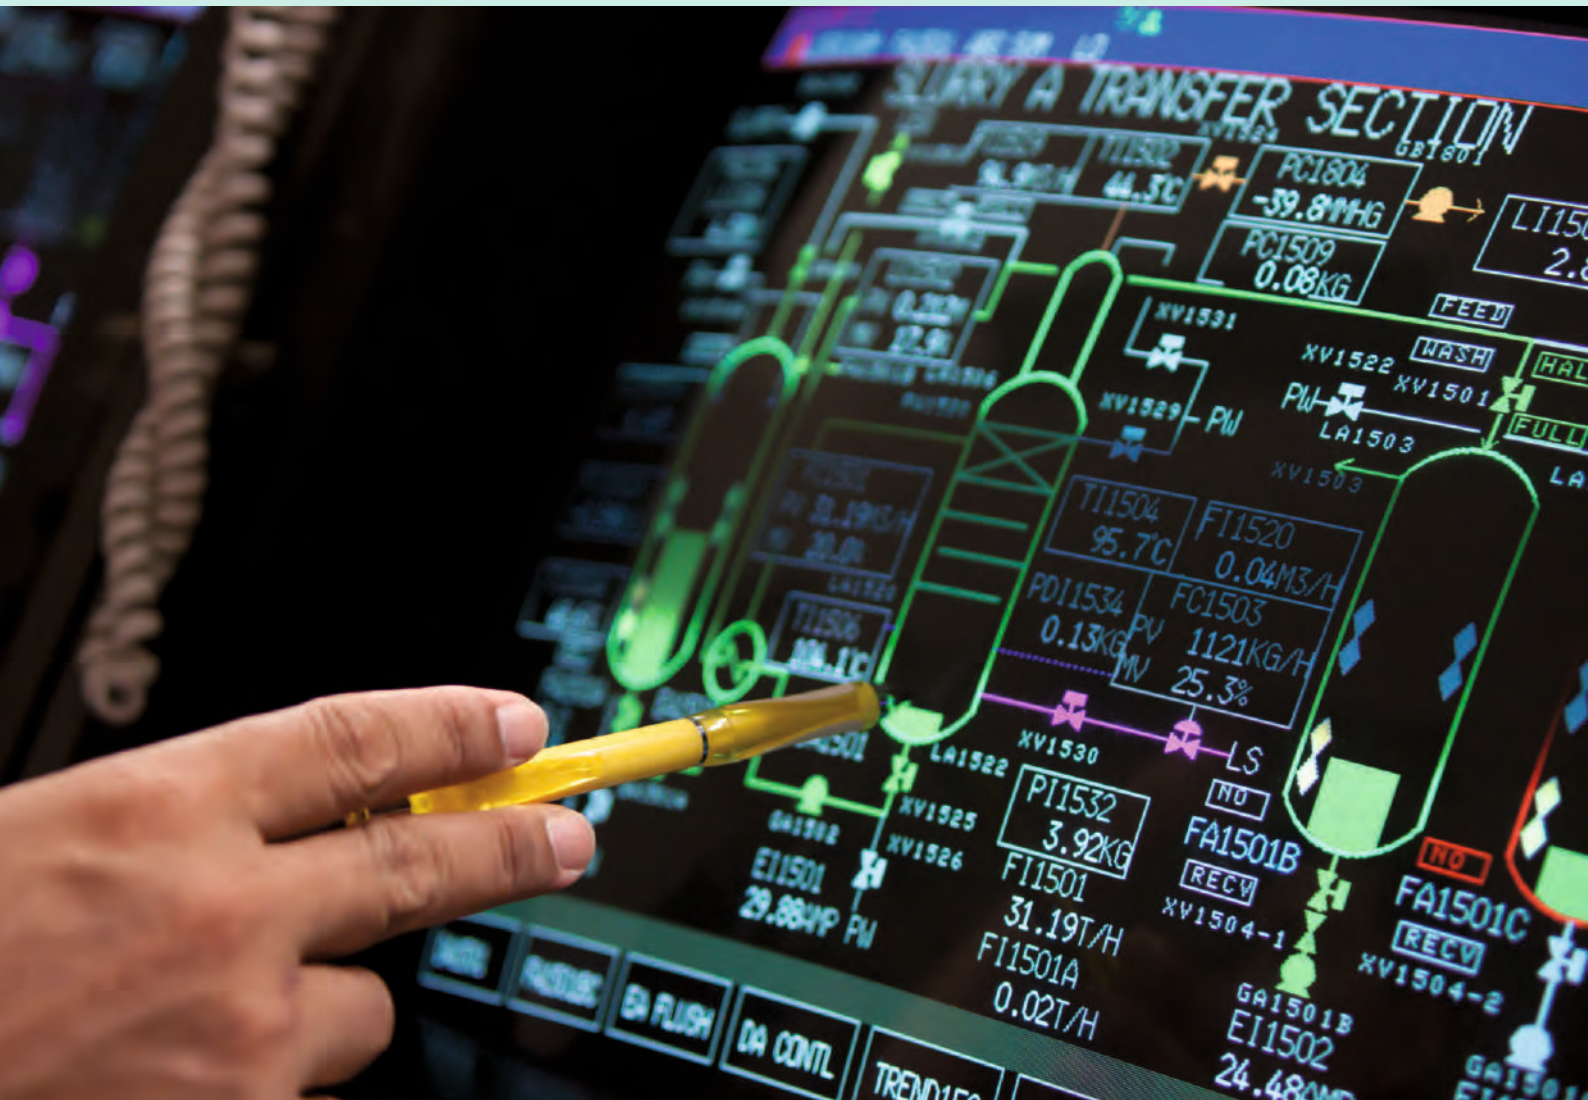



Why an UPS?

Even today the quality of power supply is a problem. Voltage interruptions and various electrical disturbances are a daily issue and can create considerable problems, either to the powered equipment or to the time lost due to interruptions, with additional risk of data losses on important files.

Today more than ever, time and speed are important resources. The interruption of our work because of these disadvantages involves a very high cost and the reactivation of normal operations, which may last even a few hours, must be minimized.

If not protected, computer systems are often victims of disturbances they may compromise good functioning. Provide adequate protection to our utilities means not only to safeguard our goods, but also to avoid costs not only in terms of money but also such for quality of work and for data availability.

It is therefore very advantageous to be sure of a continuous and safe work, protected by Elsis uninterruptible power systems.

Main blocks on a UPS

RECTIFIER	it converts the AC input voltage into an intermediate DC voltage and charges the battery
INVERTER	it converts the intermediate DC voltage into a filtered AC voltage to the load
BATTERIES SET	they store energy when mains is present. when input source is lost they supply the load for a certain amount of time


Technical term	Symbol	Description
Volt	V	Voltage
Ampere	A	Current
Power Factor	$\cos \varphi$	Phase shift angle between voltage and current
Watt	W	Real power (Volt x Ampere x $\cos \varphi$)
Voltampere	VA	Apparent power (Volt x Ampere if single phase Volt x Ampere x $\sqrt{3}$ if three-phase)
Frequency	Hz	Number of cycles per second
Crest Factor	CF	Ratio between peak current and effective current (I_{pk}/I_{eff})
Autonomy time	minute	UPS runtime when supplied by the battery

UPS operation

LINE INTERACTIVE SERIES

Our UPS Line Interactive range assures safe and cost-effective reliability. We are pleased to recommend you Line Interactive series for all Small Office and Home users, because they represent the best price / quality ratio. Elsist take care of this product range giving great importance to design, simple appearance, user friendly interface, ease of installation for perfect integration into any type of environment.

In normal operation, the load is fed by the network through an Automatic Voltage Regulator (AVR). This circuit corrects network variations, stabilizing them within certain values. When such variations exceed AVR circuit regulation capability, battery is activated to ensure continuity of proper operation.

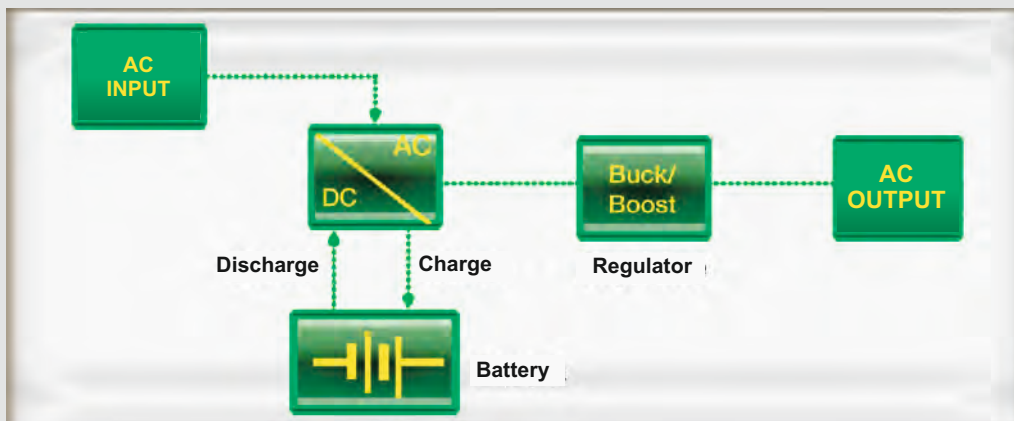


ON-LINE DOUBLE CONVERSION SERIES

Elsist UPS with on-line technology are characterized by zero time intervention, which means the load protection without interruption of the supply and with the same waveform (perfectly sinusoidal), as well as with network operation and with battery operation. In fact, a fully sine-wave voltage is perfectly reconstructed over all time. On-Line Technology models are suitable for protecting Servers, Data Center, Storage Systems, Automation, Video Surveillance, Security systems and others. ON-LINE technology can provide total protection not only for black-out but also for all the variations in voltage and frequency that silently attack our users every day.

Since 1978, Elsist has largely devoted his production to this UPS technology with expandable autonomies, hence with over-sized integrated rectifiers, in order to support additional battery modules (for business continuity). These series are also dedicated to manufacturing plant, electro-medical devices and general safety.


Elsist ON-LINE series offer also integrated shutdown software, targeted for more critical computing applications such as Servers and Data Networks. The reliability of these series is the feature on which Elsist keep focus: the total protection of applications in order to forget the risk of electrical power inconveniences.

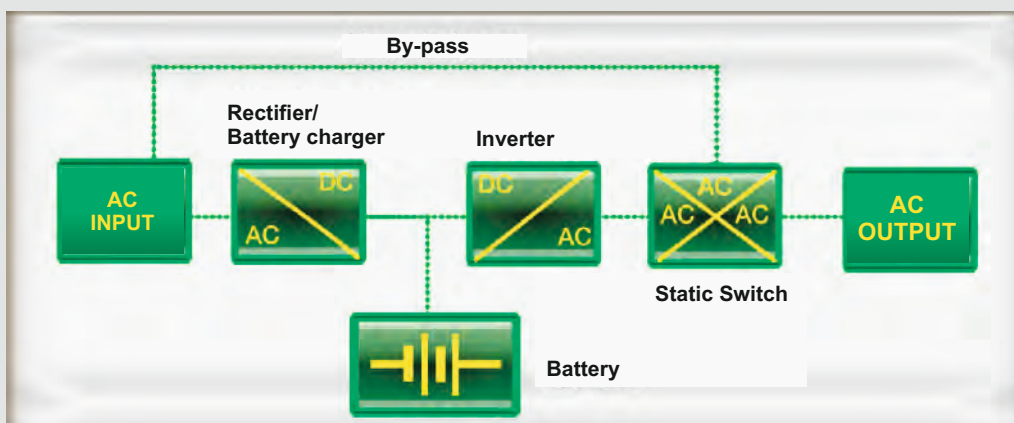




Electrical disturbance


Sometimes we experience electrical disturbances on the mains such as voltage fluctuations, spikes, flickering, blackouts that can disturb the correct operation of our systems or even cause them damages. There are various kind of electrical disturbances. Hereafter, we're listing the most common ones:




SAGS a sudden decrease of input voltage for a short time.
BROWNOUTS are steady decrease of input voltage for a long time. The load is still supplied but at a voltage below its tolerances.




BLACKOUTS no power at all, in this condition the load is not supplied




SPIKES a sudden and very large increase in the voltage level. Quite dangerous for the load




SURGES a sudden increase in the voltage level above the normal level, usually more than 20ms




NOISE voltage disturbances generated by magnetic field interference (EMI) or by radio frequency interference (RFI)



OVER VOLTAGE an increase of input voltage for a long period of time. The load is still supplied with a voltage above its tolerances. A dangerous condition for the load.



HARMONICS a distortion of the voltage waveform



FREQUENCY FLUCTUATION a frequency variation

Innovative Energy

FOR AN ECO-FRIENDLY SUSTAINABILITY

because BW is focused on energy saving, selling high efficiency products. An environmentally-friendly approach is one of our main goals since design stage, in order to sustain a clean energy development.



Technical Service

Elsist provides a 360-degree service

S e r v i c e

Elsist provides its customers with a complete technical assistance and a preventive maintenance support. Different types of Service contract are available, to allow customers to select the most suitable one for their applications. Today Elsist may offer a 24 hours a day monitoring system, handled by its service center in Milan. With this particular service contract, named "Safety", we provide a full time control of the device, by checking its operation in real time and set-up onsite intervention for problem solving whenever necessary. After sales service of Elsist is granted by a team of top trained technicians to ensure the best support for your installations.



System installation consultancy



Special selling conditions on spare parts



Checking of the environment for Standard&Norms compliance



Customized Service contract, also multi-brand



Fast support within 24 hours



Pre-sale support



«Safety Intelligent» contract for a 24 hours a day support



Special prices on labor cost



Special selling conditions for battery replacement



«Full» contract allows a free of-charge replacement

Applications

Market Segments

Elsist products are used in various critical applications with full customers satisfaction

Security



TLC



IT



Oil&Gas



Photovoltaic



Power Generation



Transportation



Hospital



Automation



Choose the most suitable UPS

Home
SOHO
POS System



MULTISTATION



HOME550



NEMO2.0



MISSION



PURE

Office
IT Segment
Banks



MISSION



UPSERVER2.0



FLEXIBLE



PURE



POLARIS

Telecom
Office
Data Center
Industrial
Banks
Railway



TRI-ONE



POLARIS



NAUTILUS

Emergency
Systems



MISSION MSS



POLARIS PSS



TRI-ONE TMSS

Special
Products



SIRIUS

MULTISTATION

Line interactive single-phase UPS

Protect your equipment with an uninterruptible power supply against data loss. Multistation 1000 has an output capability of 1000 VA.

This device is mainly designed for domestic multimedia or small office applications. It provides complete surge protection for critical loads, which are connected directly to protected sockets through the UPS.

It has a Line-interactive technology with pseudo-sinusoidal waveform and a short transfer time of 2ms. Autonomy time during a black-out is about 10'.

With its compact design, Multistation 1000 is equipped with 3 schuko outlet protected against power outages and with 3 filtered schuko outlet. It has also a USB interface for communication and a USB CHARGER output to recharge devices such as mobile phone, tablet or similar.



MultiStation 1000

Code MULTISTATION
1000

Technical Requirements

Power	VA	1000
Input Voltage		230 Vac \pm 27%
Input Frequency		50/60 Hz \pm 5%
Output Voltage		230 Vac \pm 10% (\pm 5% without mains)
Output Frequency		50/60 Hz \pm 1%
Autonomy time		10'
Battery		sealed, maintenance-free lead-acid
Output Outlets		3 protected by UPS – 3 filtered and protected against voltage fluctuations
Modem/T port (10BaseT/100BaseT)		RJ11 (2 wires, single line) or RJ45 (compatible network)
USB charger		USB output to recharge external device
Display LEDs		standard

Dimensions and Weight

Dimensions (WxHxD)	mm	202x91x290
Weight UPS standard with battery	kg	5,4

Total power protection
Ultra-wide input voltage range operation for avoiding battery discharge
Monitoring of the UPS operations
Cold start capability
Low battery/exhausted battery controls
Setting of different levels of alarm
USB interface for control and data acquisition via PC
Remote communication and control capability



NEMO 2.0

Line interactive single-phase UPS

NEMO 2.0 series by ELSIST is available in seven output power levels and provide a transfer time extremely short (4ms).

All the models (from 650VA to 4000VA) are equipped with a LCD display for monitoring:

1. Input Voltage
2. Output Voltage
3. Operating mode with input mains
4. Operating mode with battery
5. Battery Level
6. Low Battery
7. Load Level
8. Overload
9. Errors and malfunctions

NEMO 2.0 series is equipped with an automatic voltage regulation against line voltage deviations (AVR), and with overload and shortcircuit protections on the output.

All models include an integrated RJ11/RJ45 filtered connector for phone line.

A USB interface is also included in the models.

By means of the embedded shutdown software, the unit allows you to control and monitor the most important operations of the UPS.

NEMO 2.0 series meets all the requirements requested by international standards for Safety and EMC compatibility.

Provide your printers, workstations, PCs, and other IT applications with reliable protection against data loss using NEMO 2.0 series of uninterruptible power supply

Nemo 2.0

Code	NEMO 2.0 65	NEMO 2.0 80	NEMO 2.0 120	NEMO 2.0 160	NEMO 2.0 200	NEMO 2.0 300	NEMO 2.0 400
------	----------------	----------------	-----------------	-----------------	-----------------	-----------------	-----------------

Technical Requirements

	VA	650	800	1200	1600	2000	3000	4000
Input Voltage					230 Vac ± 27%			
Input Frequency					50/60 Hz ± 5%			
Output Voltage					230 Vac ± 10% (± 5% without mains)			
Output Frequency					50/60 Hz ± 1%			
Autonomy Time					10'			
Battery Type					Pb sealed, maintenance-free			
Output Outlets		2IEC	2IEC	4IEC	1		2IEC, 2SCHUKO	
Modem/T port (10BaseT/100BaseT)								RJ11 (2 wires, single line) or RJ45 (network compatibility)
USB Interface					yes			
LCD Display					yes			

Dimensions and Weight

	mm	101x142x298	101x142x298	101x142x298	149x162x353	158x198x380	158x198x380	145x213x436
Dimensions (WxHxD)								
Weight with battery	kg	3,9	4,4	4,7	8,4	10	11,4	23

- Total power protection
- Ultra-wide input voltage range operation for avoiding battery discharge
- Monitoring of UPS operations
- Cold start capability
- Low battery/exhausted battery controls
- Setting of different levels of alarm
- USB interface for control and data acquisition via PC
- Remote communication and control capability

PURE

Single-phase, Line interactive UPS with sinusoidal waveform


Our new Pure series is a line interactive UPS with short intervention time (2-6ms) and is available at 1kVA, 2kVA, 3kVA power level.

This series provide a fully sinusoidal waveform at the output.
All models are equipped with LCD display for an easy visibility of their operating status.

Main data visible on display are:

- Input voltage
- Output voltage
- Mains operation mode
- Battery operation mode
- Battery level
- Load level
- Battery discharged
- Overload
- Errors / failures

USB port and RS232 connection for remote control are available by default. The software with shutdown capability and parameters monitoring is also included in the package. The software is compatible with all most common operating systems.



Pure

Code	PURE 1000	PURE 2000	PURE 3000
------	-----------	-----------	-----------

Technical Characteristics

Power Rating	1000VA / 800W	2000VA / 1600W	3000VA / 2400W
Input Voltage	208/220/230/240 VAC		
Input Voltage Range	160-290 VAC		
Frequency Range	50/60 Hz (Auto sensing)		
Output Voltage	208/220/230/240 VAC		
AC Voltage Regulation (Batt. Mode)	±3% (before battery alarm)		
Harmonic Distortion	3%@100% linear load, 5%@100% non linear load		
Waveform (Batt. Mode)	Pure Sinewave		
Transfer Time	Typical 6 ms, 10ms max.		
Efficiency	97% Normal mode		
Battery Type & Number	85% Battery mode 12 V / 9 Ah x 2	86% Battery mode 12 V / 9 Ah x 4	86% Battery mode 12 V / 9 Ah x 6
Typical Recharge Time	5 hours recover to 90% capacity		

Full Protection	Overload, output shortcircuit, discharge, and overcharge protection
LCD Display	AC mode, batt. mode, buck boost mode, batt. level, load level, overload, fault and low batt.
USB & smart RS-232 Port	Supports Windows® 2000/2003/XP/Vista/2008, Windows® 7/10, Linux, Unix, MAC

Alarm

Battery Mode	Sounding every 10 seconds
Low Battery	Sounding every second
Overload	Sounding every 0.5 second
Fault	Continuously sounding

Dimensions and Weight

Dimension, W x H x D	mm 144x265x400	191x337x468	191x337x468
Humidity	0-90% RH@0-40degC (No condensazione)		
Noise Level	<45		



MISSION

On-line double conversion Single-phase 1K-10K

Elsist introduce the new model "MISSION". Mission is a single phase serie from 1KVA to 10KVA with PF 0,9.



Mission 1K-3K



Mission 6K-10K

Mission

On-line double conversion with DSP technology (Digital Signal Processor).

Main features are:

- High input and output PF
- Wide input voltage range (energy saving)
- Eco Mode (Economic operation mode)
- Back feed protection and Surge
- Protection - Auto self test
- Cold Start
- Parallel operation capability
- Output By-pass
- Additional battery pack
- USB
- EPO
- Software included
- Intelligent Slot SNMP board (optional)
- Dry contact (optional)

MISSION UPS is equipped with a LCD display to shows all parameters (more than 50 items), and is possible to set the most basic configurations directly on LCD display.



Control Panel LCD

MISSION UPS

True On-line UPS Double Conversion Single Phase 1kVA-10kVA

MISSION is a compact UPS, and can be used for all kind of applications.

It is a true on-line transformerless UPS, double conversion technology, single phase, from 1 kVA to 10 kVA. It includes a maintenance bypass (6KVA and 10KVA models), and it is possible to increase the back-up time by adding battery packs.

MISSION is the most suitable product for critical loads. It has 0 ms switching time and guarantee a perfect protection for all applications requiring an input voltage without disturbances and no interruptions.

A PF at 0,8 and DSP technology (Digital Signal Processor) it provides high output efficiency for all kind of loads.



Code MISSION 1KVA MISSION 2KVA MISSION 3KVA MISSION 6KVA MISSION 10KVA

Input

	1KVA/0,9KW	2KVA/1,8KW	3KVA/2,7KW	6KVA/5,4KW	10KVA/9KW
Power					
Input line	Single phase + N				
Input voltage	115±5VAC-295±5VAC			220VAC/230VAC/240VAC	
Input frequency	45-55Hz @ 50/55HZ		65Hz @ 60HZ	50/60 Hz auto sensing	
Power factor	≥ 0.98			≥ 0.80 (input THDV ≤1%)	

Output

	1KVA/0,9KW	2KVA/1,8KW	3KVA/2,7KW	6KVA/5,4KW	10KVA/9KW
Output line	Single phase + N				
Output voltage	220/230/240VAC selectable				
Output frequency	50/60 Hz				
Power factor	0.9				
Voltage tolerance	±2%			±1%	
Switching time	Main -- Battery = 0ms				
Output THD	≤ 3% (100% linear load)			≤ 2% (100% linear load)	

Batteries

Output THD	2	1	4	6	16/18/20 monoblocchi configurabili
Kind of batteries	Maintenance-free, Sealed lead acid				
Back up time	10'				

Dimensions and Weight

	mm	144x215x368	191x339x469	191x339x469	250x616x502	250x616x502
Dimensions (WxHxD)						
Weight kg	kg	10,5	21,6	26,2	62	64
Display	LCD+LED					
Colour	black					

Total power protection
 Ultra-wide input voltage range operation for avoiding battery discharge
 Monitoring of the UPS operations
 Cold start capability
 Low battery/exhausted battery controls
 Capability to set different levels of alarms
 USB interface for control and data acquisition via PC
 Remote communication and control capability through the web



MISSION MT - CEI 0-16 / CEI 0-21

Single-phase CPSS compliant with CEI 0-16 - CEI 0-21

MISSION MT series is an equipment specifically designed to provide power to all ancillary circuits in a Medium Voltage substation for at least 60 minutes. It also keep an energy storage in case of long black-out due to maintenance or severe failures on the mains.



Code	MISSION MT 1KVA	MISSION MT 2KVA	MISSION MT 3KVA	MISSION MT 6KVA	MISSION MT 10KVA
Input					
Power	1KVA/0,9KW	2KVA/1,8KW	3KVA/2,7KW	6KVA/5,4KW	10KVA/8KW
Input	Single-phase + gnd				
Input Voltage	115±5VAC-295±5VAC			220VAC/230VAC/240VAC	
Input Frequency	45-55Hz @ 50/55HZ		65Hz @ 60HZ	50/60 Hz auto select	
Power Factor	≥ 0.98			≥ 0.80 (input THDV ≤1%)	
Output					
Output	Single-phase + gnd				
Output Voltage	220/230/240VAC selectable				
Output Frequency	50/60 Hz				
Power Factor	0.9				
Output voltage	±2%			±1%	
Switching time	Mains -- Battery = 0ms				
Output voltage distortion	≤ 3% (100% linear load)			≤ 2% (100% linear load)	
Batteries					
Battery type	maintenance-free, sealed lead-acid				
Autonomy time	maintenance-free, sealed lead-acid				
Dimensions and Weight					
Dimensions (WxHxD)	mm 144x215x368	191x339x469	191x339x469	250x616x502	250x616x502
Weight UPS standard with batt.	kg 10,5	21,6	26,2	62	64
Display	LCD+LED				
Color	black				
Standards	EN/IEC 60950-1	EN/IEC 62040-1	EN/IEC 62040-2	EN/IEC 62040-3	CEI 0-16 CEI 0-21

APPLICATIONS:

- MV substations
- Substations
- LV and MV switchboards
- Automation

TECHNICAL CHARACTERISTICS:

- On-Line double conversion technology
- Sinusoidal waveform
- UPS on battery signal
- Energy storage

MISSION MSS - EN50171

Single-phase CPSS for energizing safety equipment in compliance with EN50171

Mission MSS series is designed to be compliant with EN50171 standard.

Main applications are:

- Centralized emergency lighting systems
- Automatic fire extinguishing installations
- Paging systems and signalling safety installations
- Smoke extraction equipment
- Carbon monoxide warning systems
- Specific safety installations related to specific buildings, e.g. high-risk areas.

Our "Elsist Battery Control" system allows the right operation in case of mains outages, checking the conditions of every battery pack. The battery charger is designed to recharge the batteries at 80% of total capacity in less than 8 hours.

Autonomy times may be 1, 2 or 3 hours at nominal load, according to the condition specified by EN50171 standard.



Code	MISSION MMS 1KVA	MISSION MMS 2KVA	MISSION MMS 3KVA	MISSION MMS 6KVA	MISSION MMS 10KVA
Input					
Power	1KVA/0,9KW	2KVA/1,8KW	3KVA/2,7KW	6KVA/5,4KW	10KVA/9KW
Power according to EN50171	0,75KW	1,50KW	2,25KW	4,50KW	7,50KW
Input	single-phase + gnd				
Input Voltage	115±5VAC-295±5VAC			220VAC/230VAC/240VAC	
Input Frequency	45-55Hz @ 50/55HZ		65Hz @ 60HZ	50/60 Hz auto select	
Power Factor	≥ 0.98			≥ 0.80 (input THDV ≤1%)	
Output					
Output	single-phase + gnd				
Output Voltage	220/230/240VAC selectable				
Output Frequency	50/60 Hz				
Power Factor	0.9				
Voltage tolerance	±2%			±1%	
Switching time	Mains -- Battery = 0ms				
Output voltage distortion	≤ 3% (100% linear load)			≤ 2% (100% linear load)	
Batteries					
Battery type	maintenance-free, sealed lead-acid				
Autonomy time	60' - 90' - 120'				
Dimensions and Weight					
Dimensions (WxHxD)	mm 144x215x368	191x339x469	191x339x469	250x616x502	250x616x502
Weight UPS standard with batt.	kg 10,5	21,6	26,2	62	64
Display	LCD+LED				
Battery	black				
Standards	EN/IEC 60950-1 EN/IEC 62040-1 EN/IEC 62040-2 EN/IEC 62040-3 EN 50171				

MAIN CHARACTERISTICS

- 1-High overload capability
- 2-Reverse voltage battery protection
- 3-High recharging current
- 4-10 years battery lifetime
- 5-RS232-RS485 interfaces
- 6-Relay card with clean contacts for remote alarms



MISSION CF

Single-phase Frequency converter 6K-10K

SINGLE-PHASE 50/60Hz FREQUENCY CONVERTER - MISSION TOWER SERIES

50/60Hz Frequency converter at 6kVA and 10kVA with VFI sinusoidal waveform (Voltage and Frequency Independent).

Frequency converter supply a linear current and a complete protection to:

- Data Network/PC
- Data center
- Server
- Telecommunication system
- Hospital equipment
- Industrial equipment

The Frequency converter provides an output at 50Hz or 60Hz which is independent from input frequency. The Power Factor correction circuit improves the quality of absorbed input current, thus increasing the efficiency and saving energy

Code	MISSION CF 6KVA	MISSION CF 10KVA
Input		
Power	6kVA/5.4kW	10kVA/9kW
Input	Single-phase + gnd	
Input Voltage	220VAC/230VAC/240VAC	
Input Frequency	50/60 Hz auto select	
Power Factor	≥ 0.80 (input THDV ≤1%)	
Output		
Output	Single-phase + gnd	
Output Voltage	220/230/240VAC selezionabile	
Output Frequency	50/60 Hz	
Power Factor	0.8	
Voltage tolerance	±1%	
Output voltage distortion	≤ 2% (100% linear load)	
Dimensions and Weight		
Dimensions (WxHxD) mm	250x616x502	250x616x502
Weight UPS standard with batt. kg	62	64
Display	LCD+LED	
Color	black	

Main characteristics:

- High PF at input and at output
- Wide input range (energy saving)
- Monitoring and self-test at switch-on
- USB port
- EPO contact
- Software included

MISSION series of Frequency converter is equipped with a LCD display showing all parameters (more than 50 items). Moreover, it is possible to set the base configurations directly on the display

RACK LINE

Elsit developed a Rack Line series to support the requirement of Data&IT market, where customers looks for high efficiency, easy-to-manage and reliable equipment. Our series is based on On-line technology in a 19" Rack mount arrangement, providing an efficient, flexible, compact and attractive solution.



Rack mount system

Rack mount system (detail)



LCD Display



UPSERVER 2.0

Rack-Tower on-line, double conversion UPS at 2kVA

UPServer 2.0 series is the ultimate solution to protect Server and Data Center.

It has an output power capability of 2000VA, which is suited to supply 90% of the critical loads in IT applications.

It may be configured either in rack or tower version and is based on a On-Line double conversion DSP (Digital Signal Processor) technology.

UPServer 2.0 may increase its autonomy time by adding battery packs.

USB, RS232 communication ports and filtered RJ45 port are available by default.

EPO contact is present by default, too. SNMP card and Realy card are available as option. Input and Output with IEC cables are connected for an easy and quick installation.

UPServer 2.0 is the best cost effective solution for your IT system

UPServer 2.0

Code	UPServer 2.0	
Input		
Power	2Kva/1,35Kw	
Input line	Single-phase + ground	
Input voltage	110V - 290V	
Input frequency	50Hz - 60Hz +/- 10% (autodetect)	
Power factor	0,98	
Output		
Output	Single-phase + ground	
Output Voltage	200Vac - 240Vac (configurable)	
Output Frequency	50Hz - 60Hz (sync mains)	
Power Factor	0,7	
Output voltage	1%	
Switching time	Zero	
Output voltage distortion	Thd < 3%	
Batteries		
Number of batteries	2	
Battery type	12V 9Ah (standard) Maintenance-free, sealed lead-acid	
Autonomy time	10' (expandable)	
Dimensions and Weight		
Dimensions (WxHxD)	mm	440x86,5x430
Weight UPS	kg	15,1
Display	LCD + LED	
Color	black	

FLEXIBLE

Rack-Tower on-line, double conversion UPS at 1kVA - 3kVA

FLEXIBLE series is available in three different output power : 1000VA – 1500VA – 3000VA.
All output power have compact dimensions, perfect to be installed into rack cabinet with 600mm maximum depth. The 3000VA model is 520mm max. deep.

FLEXIBLE series can be installed in rack or tower version, it is a true On-line UPS with double conversion technology and DSP control (Digital Signal Processor).

Power factor at 0,9 for 1000VA and 3000VA, whilst model 1500VA operates with power factor 1.
It is possible to increase the back up time with additional battery packs.

USB and RS232 are standard communications ports, and also RJ45 filter port is available by default.
EPO contact is included and it is possible to use SNMP or RELAY CARD (optional) with Intelligent slot port on the rear panel.

FLEXIBLE is configured with terminal block (input and output), perfectly suitable for every kind of industrial applications.

FLEXIBLE is the best in class UPS with high quality. It's your best choice to protect critical load.



Flexible

Code	Flexible1000	Flexible1500	Flexible3000
Input			
Power	1kVA/0,9kW	1,5kVA/1,5kW	3kVA/2,7kW
Input line	Single-phase + ground		
Input voltage	110V - 290V		
Input frequency	50Hz - 60Hz +/- 10% (autodetect)		
Power factor	0,98		
Output			
Output	Single-phase + ground		
Output Voltage	200Vac - 240Vac (configurable)		
Output Frequency	50Hz - 60Hz (sync mains)		
Power Factor	0,9	1	0,9
Output voltage	1%		
Switching time	Zero		
Output voltage distortion	Thd < 3%		
Batteries			
Number of batteries	2	3	6
Battery type	12V 9Ah (standard)	12V 7Ah (standard)	12V 7Ah (standard)
Autonomy time	10' (expandable)		
Dimensions and Weight			
Dimensions (WxHxD)	mm 440x86,5x430	440x86,5x430	440x131x520
Weight UPS	kg 15,1	18	26
Display	LCD + LED		
Color	black		

NEW!

FLEXIBLE

Rack-Tower, on-line, double conversion UPS at 6kVA – 10kVA



Flexible series is now completed by two new devices with high output power, from 6kVA to 10kVA.

These uninterruptible power supplies can be configured in a rack or tower version, are based on double conversion on-line topology with DSP (Digital Signal Processor) technology and have a power factor of 0.9.

The autonomy in case of power failure can be increased thanks to the additional battery packs. The products are equipped with USB, RS232 and parallel communication ports. In addition, an Intelligent slot for SNMP card (optional) or Relay card (optional) and an EPO contact are available.

The input and output terminals are easily accessible for simple configuration in all industrial environments. The Flexible series is ideal for protecting critical loads that require continuous, high quality power supply and with zero network to battery transfer time.



Flexible

Code	Flexible6000	Flexible10000
Input		
Power	6kVA/5,4kW	10kVA/9kW
Input line	Single-phase with GND connection	
Input voltage	220/230/240Vac (L+N+GND)	
Input frequency	45-55Hz / 54-66Hz ±0,5Hz	
Power factor	≥0.99	
Harmonic distortion	≤3% (100% linear load)	
THDi		
Output		
Output Voltage	220/230/240Vac	
Output Frequency	50-60Hz (sync mains)	
Power Factor	0.9	
Voltage regulation	±2%	
Switching time	zero	
Output Voltage distortion THDv	≤2% with linear load	
Waveform	sinusoidal	
Efficiency	>93,5%	
Batteries		
Battery Voltage	±96/±108/±120Vdc	
Type of battery	Sealed lead-acid, no maintenance	
Recharge time (typ.)	6-8 hours	
Charging current	10A max	
Communication		
Communication interface	USB, RS232, Parallel port, SNMP/ Relay card (optional)	
General Characteristics		
Operating temperature	0 - 40°C	
Humidity	0 95% no condensing	
Altitude	<1500m	
Noise	<55dB	
Dimensions and Weight		
Dimensions (WxHxD)	440x86x520mm	440x131x580mm
Net weight	23kg	25kg
Safety	IEC/EN62040-1 IEC/EN60950-1	
EMC	EN62040-2, IEC61000-4-2, IEC61000-4-3, IEC61000-4-4, IEC61000-4-5, IEC61000-4-6, IEC61000-4-8	

TRI-ONE UPS

Three-phase in / Single-phase out on-line UPS

Tri-One is an On-line double conversion UPS with Three-Phase input and Single-Phase output.

It is available at different output power: 10kVA, 15kVA and 20kVA.

Thanks to its high performance, Tri-One series provides the best protection for any kind of application and load.

Through its LCD display it is possible to control all parameters and functions. Moreover, it is possible to remotely control the UPS by means of the SNMP card. Tri-One series use a smart recharge control for the battery, in order to increase their lifetime (see picture below). In fact, batteries are charged at three different steps, increasing their performance and life, and reduce overall cost.



Code	TRI-ONE 10	TRI-ONE 15	TRI-ONE 20
------	------------	------------	------------

Technical characteristics

Power	Vac	10kVA/9kW	15kVA/13,5kW	20kVA/18kW
Input Voltage	Vac	208 – 478		
Input Frequency	Hz	45-65		
Phase		Three-phase		
THD current		< 2% linear load		
Power Factor		da 0.99 a 100% with linear load		
Output Voltage Vac	Vac	230 ±1%		
Output Power (possibility to increase cosphi)	Hz	50/60		
Output Frequency		Sinusoidal THD <2%		
Frequency Tolerance		±0.2Hz (without mains)		
Switching time		0 ms		
Overload capability		150% per 10 sec. Before switching to By-pass		
Efficiency		AC – AC in normal operation > 96%		

Batteries

Type		Maintenance-free, sealed lead-acid		
Typ. autonomy time		10 minutes		
Cold Start		Yes		
Voltage	Vdc	240		
Recharge time		4 - 6 hours		

General Characteristics

Noise		<50 dB ad 1 m		
Operating Temperature		0°C ~ 40°C electronics (batteries 18°C ~ 25°C)		
Humidity		fino al 90% without condensing		
Operating Altitude		up to 3000 slm		

Mechanical Characteristics

Connection with external battery cabinet		Plug-in & Play		
Output outlet		Terminal blocks		

Protection

Input		Breaker		
Output		Current protection threshold		
Battery		Fuse / Breaker		
By-pass overload		Up to 200% for 500 sec. then output switch Off		
Minimum Battery Voltage		Audible alarm then Inverter off		

Dimensions and Weight

Dimensions (WxHxD)	mm	250x655x597	250x616x502 *	250x616x502 *
Weight UPS	kg	76	45 + 80	48+80

Safety

Safety Standard compliance		EN50091-1, cUL, 62040-3		
EMC Standard		EN50091-2, EN61000-3-3, EN61000-3-2, FCC Classe A		

* (+ battery cabinet)



TRI-ONE TMSS - EN50171

CPSS for energizing safety equipment in compliance with EN50171

Tri-One TMSS series is designed to be compliant with EN50171 standard.

Main applications are:

- Centralized emergency lighting systems
- Automatic fire extinguishing installations
- Paging systems and signalling safety installations
- Smoke extraction equipment
- Carbon monoxide warning systems
- Specific safety installations related to specific buildings, e.g. high-risk areas.

Our "Elsist Battery Control" system allows the right operation in case of mains outages, checking the conditions of every battery pack. The battery charger is designed to recharge the batteries at 80% of total capacity in less than 8 hours.

Autonomy times may be 1, 2 or 3 hours at nominal load, according to the condition specified by EN50171 standard.

Code		TRI-ONE TMSS 10	TRI-ONE TMSS 15	TRI-ONE TMSS 20
Technical requirements				
Power		10kVA/8kW	15kVA/12kW	20kVA/16kW
Input Voltage	Vac		208 – 478	
Input Frequency	Hz		45-65	
Input			Three-phase	
THD current			< 2% with mains	
Power Factor			da 0.99 a 100% without mains	
Output Voltage	Vac		230 ±1%	
Output Power (according to EN50171)		7,5kW	11,3kW	15kW
Output Frequency	Hz		50/60	
Waveform Sinusoidal			Sinusoidal THD <2%	
Frequency Stability			±0.2Hz (without mains)	
Switching time			0 ms	
Overload		150% per 10 sec. before switching to By-pass		
Efficiency		AC – AC in normal operation > 96%		
Batteries				
Type		maintenance-free, sealed lead-acid		
Autonomy time (typ)		10 minutes		
Cold Start		yes		
Battery Voltage	Vdc	240		
Recharge time		quick recharge up to 8 hours		
General Characteristics				
Noise		<50 dB at 1 m		
Operating Temperature		0°C ~ 40°C electronics (battery 18°C ~ 25°C)		
Humidity		up to 90% without condensing		
Altitude		up to 3000m		
Mechanical				
External battery cabinet connection		Plug-in & Play		
Outlet		Terminal blocks		
Protection				
Input		Breaker		
Output		Electronic limit of current		
Battery		Fuse / Breaker		
Overload By-pass		Sino al 200% per 500 sec. poi toglie l'uscita		
Dimensions and Weight				
Dimensions (WxHxD)	mm	250x655x597	250x616x502 *	250x616x502 *
Weight UPS + battery	kg	76	45 + 80	48+80
Safety				
Safety standard		EN50091-1, cUL, 62040-3		
EMC		EN50091-2, EN61000-3-3, EN61000-3-2, FCC Classe A		

* (+ battery cabinet)

TRI-ONE CF

Three-phase/Single-phase Frequency converter at 10kVA-15kVA-20kVA

THREE-PHASE/SINGLE-PHASE FREQUENCY CONVERTER 50/60Hz - TRI-ONE TOWER SERIES

50/60Hz Frequency converter at 6kVA and 10kVA with VFI sinusoidal waveform (Voltage and Frequency Independent).

Frequency converter supply a linear current and a complete protection to:

- Data Network/PC
- Data center
- Server
- Telecommunication system
- Hospital equipment
- Industrial equipment

The Frequency converter provides an output at 50Hz or 60Hz which is independent from input frequency. The Power Factor correction circuit improves the quality of absorbed input current, thus increasing the efficiency and saving energy.



Code	TRI-ONE CF 10	TRI-ONE CF 15	TRI-ONE CF 20
------	---------------	---------------	---------------

Technical Characteristics

Power		10kVA/9kW	15kVA/13,5kW	20kVA/18kW
Input Voltage	Vac	208 – 478		
Input Frequency	Hz	45-65		
Input		Three-phase		
THD current		< 2% with linear load		
Power Factor		from 0.99 to 100% with linear load		
Output Voltage	Vac	230 ±1%		
Output Frequency	Hz	50/60		
Waveform	Sinusoidal	Sinusoidal THD <2%		
Frequency Stability		±0.2Hz (without mains)		
Overload		150% per 10 sec. before switching to By-pass		
Efficiency		AC – AC in normal operation > 96%		

General Characteristics

Noise		<50 dB ad 1 m		
Operating temperature		0°C ~ 40°C electronic (batteries 18°C ~ 25°C)		
Humidity		up to 90% without condensing		
Altitude		up to 3000 m		

Mechanical

External battery cabinet connection		Plug-in & Play		
Outlet		Terminal blocks		

Protection

Input		Breaker		
Output		Electronic limit of current		
Minimum battery voltage		Audible Alarm. Then Inverter shutdown		

Dimensions and Weight

Dimensions (WxHxD)	mm	250x655x597	250x616x502	250x616x502
Weight UPS + battery	kg	76	45 + 80	48+80

Safety

Safety standard		EN50091-1, cUL, 62040-3		
EMC		EN50091-2, EN61000-3-3, EN61000-3-2, FCC Classe A		

Main characteristics:

- High PF at input and at output
- Wide input range (energy saving)
- Monitoring and self-test at switch-on
- USB port
- EPO contact
- Software included

TRI-ONE series of Frequency converter is equipped with a LCD display showing all parameters (more than 50 items). Moreover, it is possible to set the base configurations directly on the display



SIRIUS

Rack-Tower, on-line, double conversion UPS 1K – 3K at 110Vac

Sirius series is a special product with power from 1kVA to 3kVA.

These uninterruptible power supplies can be configured in a rack or tower version, are based on double conversion on-line topology with DSP (Digital Signal Processor) technology and operate with an input / output voltage of 110Vac.

The autonomy time in case of power failure can be increased thanks to the additional battery packs. The products are equipped with RS232 communication port and RJ45 port by default. Also available is an Intelligent SNMP card insertion slot (optional) and an EPO contact.

The input and output terminals are easily accessible for simple configuration in all industrial environments. The Sirius series is ideal for protecting critical loads that require continuous, high quality power supply and with zero network / battery transfer time.

Sirius

Code	Sirius1000	Sirius2000	Sirius3000
Input			
Power	1kVA/0,7kW	2kVA/1,4kW	2kVA/2,1kW
Input type	Single-phase with GND connection		
Input voltage	Io≤60% 55-138Vac ±5%, Io>80% 80-138Vac ±5%		
Input frequency	46-55Hz / 56-64Hz		
Power Factor	≥0.97		
Output			
Output Voltage	110/115/120Vac		
Output Frequency	In AC mode: same than Mains; in Batt mode: 50/60Hz		
Power Factor	0.7		
Voltage regulation	±2%		
Switching time	Zero		
Output Voltage distortion THDv	≤5% with linear mode		
Waveform	sinusoidal		
Efficiency	>85% in AC mode; >83% in Batt mode		
Batteries			
Battery voltage	36Vdc	96Vdc	96Vdc
Battery type	12V - 9Ah	12V - 7.2Ah	12V - 7.2Ah
Autonomy time	12min	20min	16min
Recharge time (typ.)		8 hours	
Recharge current		1A max.	
Communication			
Communication interface	RS232, RJ45, SNMP (optional)		
General Characteristics			
Operating temperature	0 – 40°C		
Humidity	0 95% no condensing		
Altitude	<1500m		
Noise	<45dB		
Mechanical			
Dimensions (WxHxD)	440x86.5x450mm	440x131x550mm	440x131x550mm
Net weight	18kg	36kg	37kg

POLARIS

Three-phase on-line, double conversion UPS at 10kVA-350kVA

POLARIS is a true on-line UPS, double conversion technology with high efficiency. Input and Output voltages are three-phase. Rating power available from 10kVA to 350kVA.

High performance and high efficiency with PF 0,9 and PF 1.

POLARIS uses power modular technology and it works in redundancy mode N+x.

It is a flexible system, in fact is possible to add or remove power cabinets depending by the amount of load to supply. In this way it is possible to optimize the financial investments by escalating the configuration according to the real needs.

POLARIS can be used for any kind of load: IT, AUTOMATIC MACHINE, DATA CENTER, HOSPITAL, INDUSTRY, etc. POLARIS can solve every kind of problems, such as blackouts, spikes, voltage disturbances, frequency disturbances, harmonic distortion (THD <2%), current noise, brownouts, surges, and so on.

POLARIS serie uses a Digital Signal Processor (DSP) control to increase the reliability, the efficiency, and for auto protection and auto diagnosis.

Polaris series keep input current balanced. No unbalance problems may occur during the operation



Polaris



Polaris 3-phase 10k-350k

MAIN FEATURES:



- True On-line UPS input three-phase + N, output three-phase + N
- Switching time 0 ms
- Power factor 0,9 or 1
- LCD display
- Modular power from 10kVA to 350kVA
- DSP (Digital Signal Processor)
- Input Low distortion < 2%
- ECO mode function
- Optional: SNMP, MODBUS, RELAY. Standard: USB port, RS485, EPO contact
- EPO contact
- Battery configured from 16-18-20 blocks according to application's requirement.
- ModBus 485



POLARIS

Three-phase on-line, double conversion UPS at 10kVA-350kVA

Figure 1: cabinet UPS

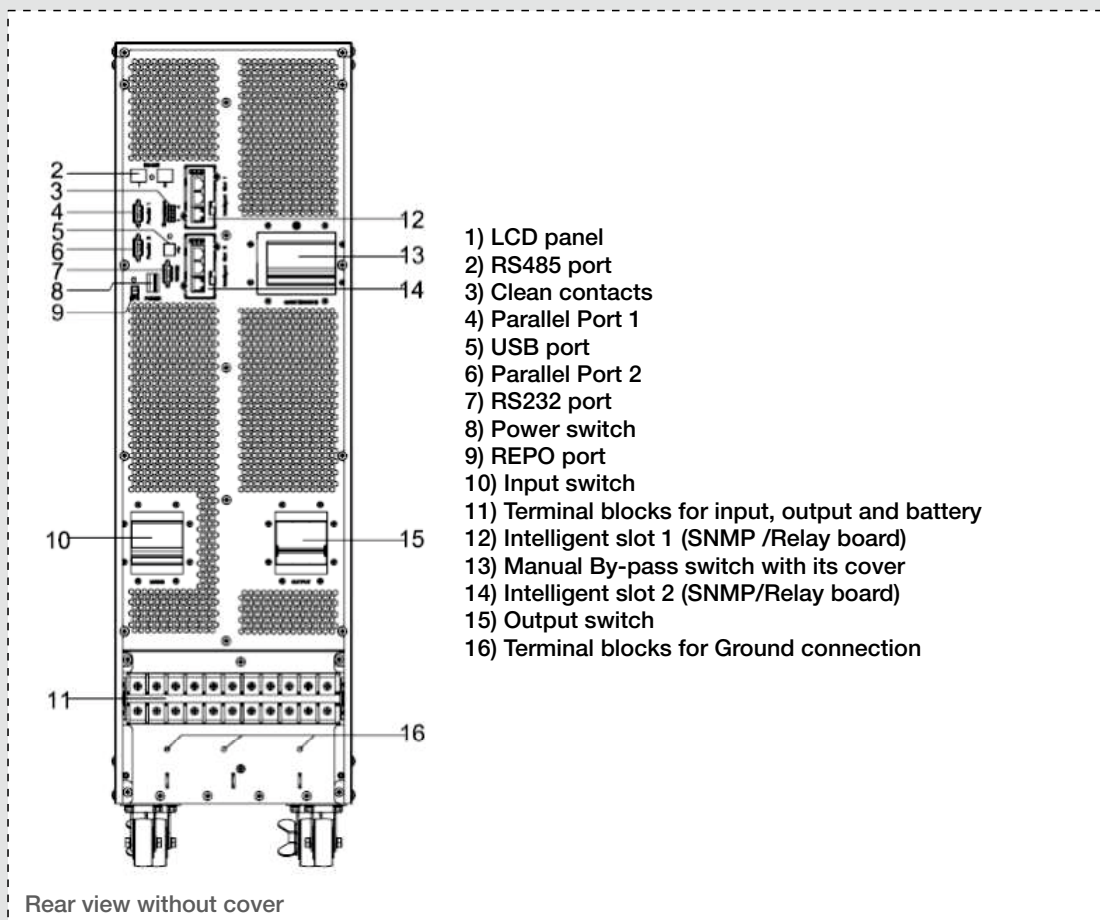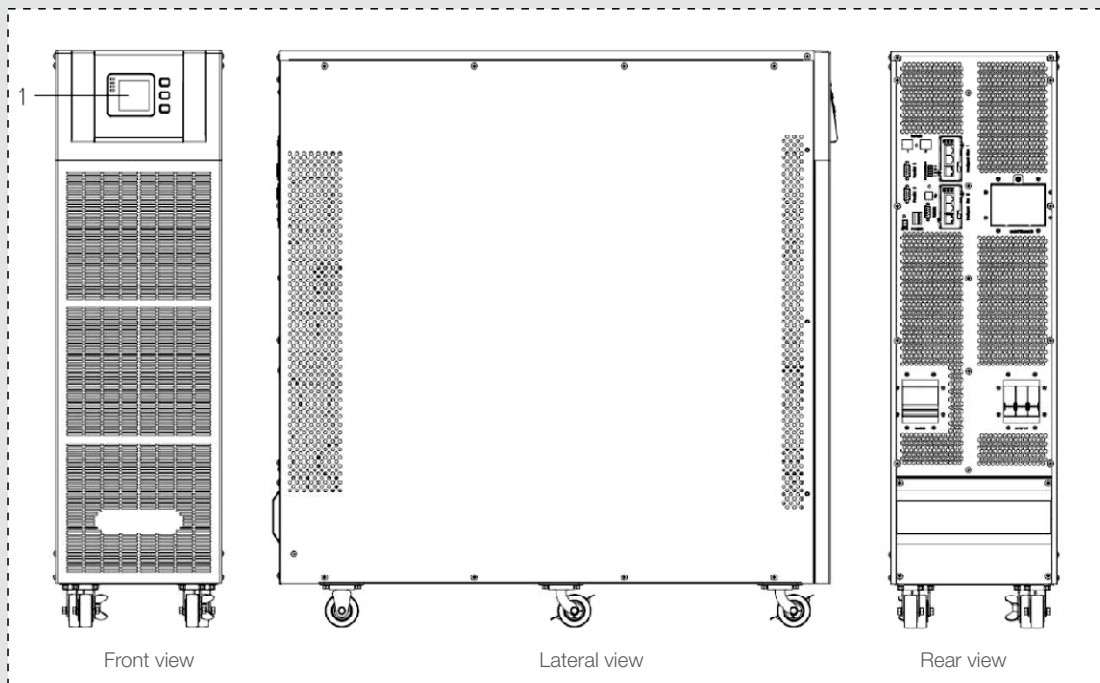


Modular power technology

Modular power technology used for POLARIS serie is an easy "Parallel concept".

POLARIS serie has an intelligent sensor which automatically detects other UPSs with same power. No settings via software, no parallel boards needed, UPS it is always ready and with a self test reset and adjust its output power.

Parallel control cables are shielded with double isolation to avoid noise interference. The cables are connected in ring mode, as shown in the picture below. Ring connection is very reliable.

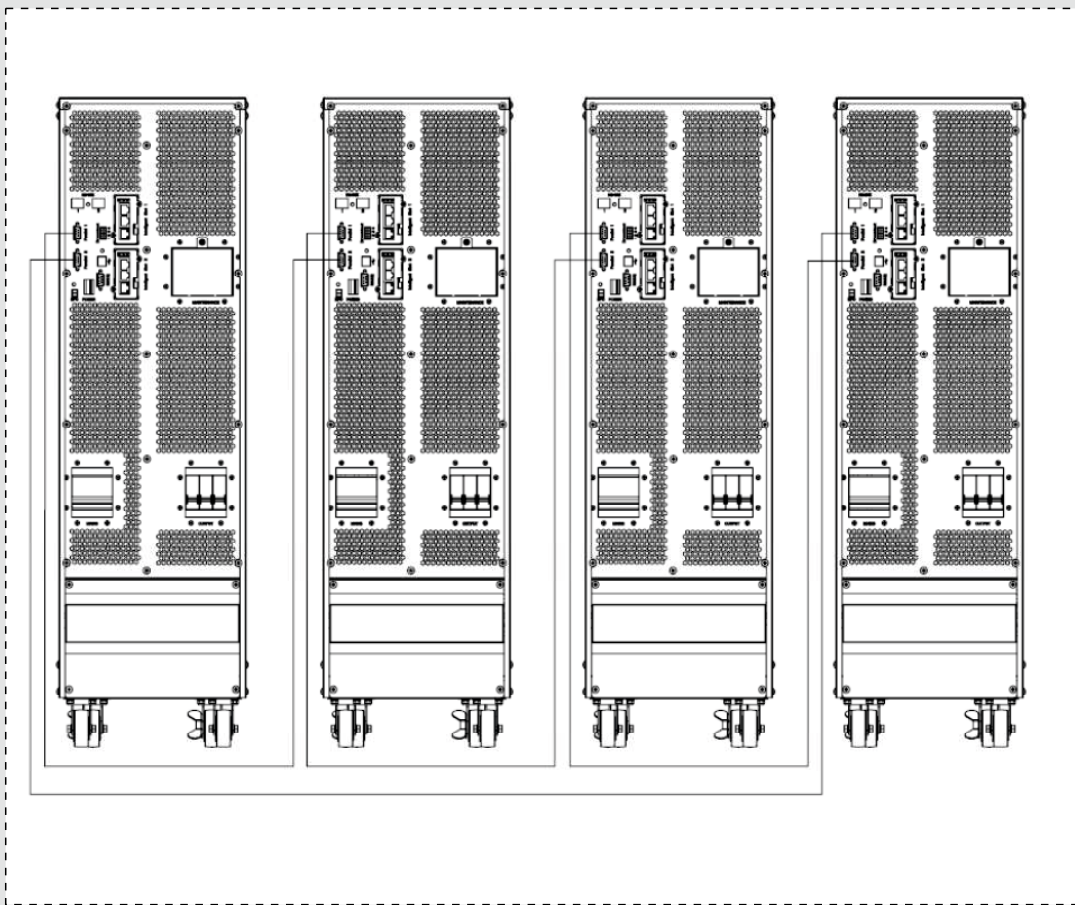

The parallel configuration guarantees an higher reliability than a single "full power" UPS. For making a correct configuration it is important to meet the items written below:

- 1) Every UPS must have the same power and connected to the same by-pass line .
- 2) The electric cables (input, output, by-pass) must have the same length and same characteristics



POLARIS UPS

Three-phase on-line, double conversion UPS at 10K-350K

MODEL POWER	POLARIS10 10KVA/9KW	POLARIS15 15KVA/13,5KW	POLARIS20 20KVA/18KW	POLARIS30 30KVA/27KW
Input	Three-phase + N			
Voltage	Vac 380-400-415			
Frequency	45 - 60 Hz (auto sensing)			
Power Factor	0,99			
THDi	< 2%			
Output	Three-phase + N			
Voltage	380-400-415 Vac			
Frequency	45 - 60 Hz (+/- 0,1%)			
Power Factor	0,9	0,9	0,9	0,9
THDo	< 1% (linear load) - <3% (non linear load)			
Efficiency	> 96,5%	> 97,5%	> 97,5%	> 97,5%
Battery	Dynamic 16pcs - 18pcs. - 20pcs. (configurable)			
Autonomy	10' standard with embedded battery			
Switching time	0 ms.			
Overload	Normal op.: 110% 60' - 125% 10' - 150% 1' - >150% switch to bypass			
Self-check	Automatic self test at switch on			
Display	LCD: Voltage IN/OUT - Frequency IN/OUT - Load - Battery Voltage Operating Temp. - Overload - Failure - Alarms			
Interface	USB - RS485 - Clean Contacts - Intelligent slot - MODBUS 485			
Communication	SNMP (optional) - RELAY card (optional)			
Operating temperature	Operating: 0° + 40° / Storage: -25° + 55°			
Dimensions (WxHxD)	250x868x828 mm	250x868x828 mm	250x868x828 mm	250x868x828 mm
Number of Units	1	1	1	1
MODEL POWER	POLARIS40 40KVA/36KW	POLARIS60 60KVA/54KW	POLARIS80 80KVA/72KW	POLARIS100 100KVA/81KW
Input	Three-phase + N			
Voltage	Vac 380-400-415			
Frequency	45 - 60 Hz (auto sensing)			
Power Factor	0,99			
THDi	< 2%			
Output	Three-phase + N			
Voltage	380-400-415 Vac			
Frequency	45 - 60 Hz (+/- 0,1%)			
Power Factor	0,9	0,9	0,9	0,8
THDo	< 1% (linear load) - <3% (non linear load)			
Efficiency	> 97,5%	> 97,5%	> 97,5%	> 97,5%
Battery	Dynamic 16pcs - 18pcs. - 20pcs. (configurable)			
Autonomy	10' standard with embedded battery			
Switching time	0 ms.			
Overload	Normal op.: 110% 60' - 125% 10' - 150% 1' - >150% switch to bypass			
Self-check	Automatic self test at switch on			
Display	LCD: Voltage IN/OUT - Frequency IN/OUT - Load - Battery Voltage Operating Temp. - Overload - Failure - Alarms			
Interface	USB - RS485 - Clean Contacts - Intelligent slot - MODBUS 485			
Communication	SNMP (optional) - RELAY card (optional)			
Operating temperature	Operating: 0° + 40° / Storage: -25° + 55°			
Dimensions (WxHxD)	250x868x828 mm	250x868x828 mm	250x868x828 mm	750x868x828 mm
Number of Units	1	1	1	3


NOTE: MODEL AT COSφ 1 UPON REQUEST

POLARIS UPS

Three-phase on-line, double conversion UPS at 10K-350K



MODEL POWER	POLARIS120 120KVA/108KW	POLARIS160 160KVA/144KW	POLARIS180 180KVA/162KW	POLARIS200 200KVA/162KW
Input	Three-phase + N			
Voltage	Vac 380-400-415			
Frequency	45 - 60 Hz (auto sensing)			
Power Factor	0,99			
THDi	< 2%			
Output	Three-phase + N			
Voltage	380-400-415 Vac			
Frequency	45 - 60 Hz (+/- 0,1%)			
Power Factor	0,9	0,9	0,8	0,8
THDo	< 1% (linear load) - <3% (non linear load)			
Efficiency	> 97,5%	> 97,5%	> 97,5%	> 97,5%
Battery	Dynamic 16pcs - 18pcs. - 20pcs. (configurable)			
Autonomy	10' standard with embedded battery			
Switching time	0 ms.			
Overload	Normal op.: 110% 60' - 125% 10' - 150% 1' - >150% switch to bypass			
Self-check	Automatic self test at switch on			
Display	LCD: Voltage IN/OUT - Frequency IN/OUT - Load - Battery Voltage Operating Temp. - Overload - Failure - Alarms			
Interface	USB - RS485 - Clean Contacts- Intelligent slot - MODBUS 485			
Communication	SNMP (optional) - RELAY card (optional)			
Operating temperature	Operating: 0° + 40° / Storage: -25° + 55°			
Dimensions (WxHxD)	500x868x828 mm	500x868x828 mm	750x868x828 mm	750x868x828 mm
Number of Units	2	2	3	3



MODEL POWER	POLARIS250 250kVA / 240kW	POLARIS300 300kVA / 288kW	POLARIS320 320kVA / 288kW	POLARIS350 350kVA / 288kW
Input	Three-phase + N			
Voltage	Vac 380-400-415			
Frequency	45 - 60 Hz (auto sensing)			
Power Factor	0,9	0,9	0,9	0,8
THDi	< 2%			
Output	Three-phase + N			
Voltage	380-400-415 Vac			
Frequency	45 - 60 Hz (+/- 0,1%)			
Power Factor	< 1% (linear load) - <3% (non linear load)			
THDo	>97,5%			
Battery	Dynamic 16pcs - 18pcs. - 20pcs. (configurable)			
Autonomy	10' standard with embedded battery			
Switching time	0 ms.			
Overload	Normal op.: 110% 60' - 125% 10' - 150% 1' - >150% switch to bypass			
Self-check	Automatic self test at switch on			
Display	LCD: Voltage IN/OUT - Frequency IN/OUT - Load - Battery Voltage Operating Temp. - Overload - Failure - Alarms			
Interface	USB - RS485 - Clean Contacts- Intelligent slot - MODBUS 485			
Communication	SNMP (optional) - RELAY card (optional)			
Operating temperature	Operating: 0° + 40° / Storage: -25° + 55°			
Dimensions (WxHxD)	750x868x828	1000x868x828	1000x868x828	1000x868x828
Number of Units	3	4	4	4

NOTE: MODEL AT COSφ 1 UPON REQUEST



POLARIS PSS - EN50171

CPSS for energizing safety equipment in compliance with EN50171

MODEL POWER	POLARIS10PSS 10KVA/9KW	POLARIS15PSS 15KVA/13,5KW	POLARIS20PSS 20KVA/18KW
POWER according to EN50171	7,5KW	11,3KW	15KW
Input	Three-phase + N		
Voltage	Vac 380-400-415		
Frequency	45 - 60 Hz (auto sensing)		
Power Factor	0,99		
THDi	< 2%		
Output	Three-phase + N		
Voltage	380-400-415 Vac		
Frequency	45 - 60 Hz (+/- 0,1%)		
THDo	< 1% (linear load) - <3% (non linear load)		
Efficiency	> 96,5%	> 97,5%	> 97,5%
Battery	Dynamic 16pcs - 18pcs - 20pcs. (configurable)		
Autonomy	60 / 120 / 180 min		
Switching time	according to EN50171		
Overload	Normal op.: 110% 60' - 125% 10' - 150% 1' - >150% switch to bypass		
Self testing	Automatic self test at switch on		
Display	LCD: Voltage IN/OUT - Frequency IN/OUT - Load - Battery Voltage Operating Temp. - Overload - Failure - Alarms		
Interface	USB - RS485 - Clean Contacts - Intelligent slot		
Communication	SNMP (optional) - MODBUS (optional) - RELAY card (optional)		
Operating temperature	Operating: 0° + 40° / Storage: -25° + 55°		
Dimensions (WxHxD)	250x868x828 mm	250x868x828 mm	250x868x828 mm
Number of Units	1	1	1
Standards	EN/IEC 60950-1	EN/IEC 62040-1 EN/IEC 62040-2	EN/IEC 62040-3 EN 50171

MODEL POWER	POLARIS30PSS 30KVA/27KW	POLARIS40PSS 40KVA/36KW	POLARIS60PSS 60KVA/54KW
POWER according to EN50171	22,5KW	30KW	45KW
Input	Three-phase + N		
Voltage	Vac 380-400-415		
Frequency	45 - 60 Hz (auto sensing)		
Power Factor	0,99		
THDi	< 2%		
Output	Three-phase + N		
Voltage	380-400-415 Vac		
Frequency	45 - 60 Hz (+/- 0,1%)		
THDo	< 1% (linear load) - <3% (non linear load)		
Efficiency	> 97,5%	> 97,5%	> 97,5%
Battery	Dynamic 16/18/20pcs	Dynamic 32/34/36/38/40pcs	Dynamic 16/18/20pcs
Autonomy	60 / 120 / 180 min		
Switching time	according to EN50171		
Overload	Automatic self test at switch on		
Self testing	Automatic self test at switch on		
Display	LCD: Voltage IN/OUT - Frequency IN/OUT - Load - Battery Voltage Operating Temp. - Overload - Failure - Alarms		
Interface	USB - RS485 - Clean Contacts - Intelligent slot		
Communication	SNMP (optional) - MODBUS (optional) - RELAY card (optional)		
Operating temperature	Operating: 0° + 40° / Storage: -25° + 55°		
Dimensions (WxHxD)	250x868x828 mm	250x868x828 mm	250x868x828 mm
Number of Units	1	1	1
Standards	EN/IEC 60950-1	EN/IEC 62040-1 EN/IEC 62040-2	EN/IEC 62040-3 EN 50171

POLARIS PSS - EN50171

CPSS for energizing safety equipment in compliance with EN50171



MODEL POWER	POLARIS80PSS 80KVA/72KW	POLARIS100PSS 100KVA/81KW	POLARIS120PSS 120KVA/108KW
POWER according to EN50171	60KW	75KW	90KW
Input	Three-phase + N		
Voltage	380-400-415 Vac		
Frequency	45 - 60 Hz (auto sensing)		
Power Factor	0,99		
THDi	< 2%		
Output	Three-phase + N		
Voltage	380-400-415 Vac		
Frequency	45 - 60 Hz (+/- 0,1%)		
THDo	< 1% (linear load) - <3% (non linear load)		
Efficiency	> 97,5%	> 97,5%	> 97,5%
Battery	Dynamic 32/34/36/38/40pcs	Dynamic 6/18/20pcs	Dynamic 32/34/36/38/40pcs
Autonomy	60 / 120 / 180 min		
Switching time	according to EN50171		
Overload	Normal op: 110% 60' - 125% 10' - 150% 1' - >150% switch to bypass		
Self testing	Automatic self test at switch on		
Display	LCD: Voltage IN/OUT - Frequency IN/OUT - Load - Battery Voltage Operating Temp. - Overload - Failure - Alarms		
Interface	USB - RS485 - Clean Contacts- Intelligent slot		
Communication	SNMP (optional) - MODBUS (optional) - RELAY card (optional)		
Operating temperature	Operating: 0° + 40° / Storage: -25° + 55°		
Dimensions (WxHxD)	250x868x828 mm	750x868x828 mm	500x868x828 mm
Number of Units	1	3	2
Standards	EN/IEC 60950-1	EN/IEC 62040-1	EN/IEC 62040-2
			EN/IEC 62040-3 EN 50171

MODEL POWER	POLARIS160PSS 160KVA/144KW	POLARIS180PSS 180KVA/144KW	POLARIS200PSS 200KVA/160KW
POWER according to EN50171	120KW	135KW	150KW
Input	Three-phase + N		
Voltage	380-400-415 Vac		
Frequency	45 - 60 Hz (auto sensing)		
Power Factor	0,99		
THDi	< 2%		
Output	Three-phase + N		
Voltage	380-400-415 Vac		
Frequency	45 - 60 Hz (+/- 0,1%)		
Power factor	0,9	0,8	0,8
THDo	< 1% (linear load) - <3% (non linear load)		
Efficiency	> 97,5%	> 97,5%	> 97,5%
Battery	Dynamic 32/34/36/38/40pcs		
Autonomy	60 / 120 / 180 min		
Switching time	according to EN50171		
Overload	Normal op: 110% 60' - 125% 10' - 150% 1' - >150% switch to bypass		
Self testing	Automatic self test at switch on		
Display	LCD: Voltage IN/OUT - Frequency IN/OUT - Load - Battery Voltage Operating Temp. - Overload - Failure - Alarms		
Interface	USB - RS485 - Clean Contacts- Intelligent slot		
Communication	SNMP (optional) - MODBUS (optional) - RELAY card (optional)		
Operating temperature	Operating: 0° + 40° / Storage: -25° + 55°		
Dimensions (WxHxD)	500x868x828 mm	750x868x828 mm	750x868x828 mm
Number of Units	2	3	3
Standards	EN/IEC 60950-1	EN/IEC 62040-1	EN/IEC 62040-2
			EN/IEC 62040-3 EN 50171



POLARIS CF

Three-phase Frequency Converter at 10K-200K

THREE-PHASE/SINGLE-PHASE FREQUENCY CONVERTER 50/60Hz - POLARIS SERIES

50/60Hz Frequency converter at 6kVA and 10kVA with VFI sinusoidal waveform (Voltage and Frequency Independent).

Frequency converter supply a linear current and a complete protection to:

- Data Network/PC
- Data center
- Server
- Telecommunication system
- Hospital equipment
- Industrial equipment

The Frequency converter provides an output at 50Hz or 60Hz which is independent from input frequency.

The Power Factor correction circuit improves the quality of absorbed input current, thus increasing the efficiency and saving energy

MODEL POWER	POLARIS CF 10 10KVA/9KW	POLARIS CF 15 15KVA/13,5KW	POLARIS CF 20 20KVA/18KW
Input	Three-phase + N		
Voltage	380-400-415 Vac		
Frequency	45 - 60 Hz (auto sensing)		
Power Factor	0,99		
THDi	< 2%		
Output	Three-phase + N		
Voltage	380-400-415 Vac		
Frequency	45 - 60 Hz (+/- 0,1%)		
Power Factor	0,9	0,9	0,9
THDo	< 1% (linear load) - <3% (non linear load)		
Efficiency	> 96,5%	> 97,5%	> 97,5%
Overload	Normal op: 110% 60' - 125% 10' - 150% 1' - >150% switch to bypass		
Self Test	Automatic self test at switch on		
Display	LCD: Voltage IN/OUT - Frequency IN/OUT - Load - Battery Voltage Operating Temp. - Overload - Failure - Alarms		
Interface	USB - RS485 - Clean Contacts- Intelligent slot		
Communication	SNMP (optional) - MODBUS (optional) - RELAY card (optional)		
Temperature	Operating: 0° + 40° / Storage: -25° + 55°		
Dimensions (WxHxD)	250x868x828 mm	250x868x828 mm	250x868x828 mm
N. of units	1	1	1

MODEL POWER	POLARIS CF 30 30KVA/27KW	POLARIS CF 40 40KVA/36KW	POLARIS CF 60 60KVA/54KW
Input	Three-phase + N		
Voltage	380-400-415 Vac		
Frequency	45 - 60 Hz (auto sensing)		
Power Factor	0,99		
THDi	< 2%		
Output	Three-phase + N		
Voltage	380-400-415 Vac		
Frequency	45 - 60 Hz (+/- 0,1%)		
Power Factor	0,9	0,9	0,9
THDo	< 1% (linear load) - <3% (non linear load)		
Efficiency	> 97,5%	> 97,5%	> 97,5%
Overload	Normal op: 110% 60' - 125% 10' - 150% 1' - >150% switch to bypass		
Self Test	Automatic self test at switch on		
Display	LCD: Voltage IN/OUT - Frequency IN/OUT - Load - Battery Voltage Operating Temp. - Overload - Failure - Alarms		
Interface	USB - RS485 - Clean Contacts- Intelligent slot		
Communication	SNMP (optional) - MODBUS (optional) - RELAY card (optional)		
Temperature	Operating: 0° + 40° / Storage: -25° + 55°		
Dimensions (WxHxD)	250x868x828 mm	250x868x828 mm	250x868x828 mm
N. of units	1	1	1

POLARIS CF

Three-phase Frequency Converter at 10K-200K



MODEL POWER	POLARIS CF 80 80KVA/72KW	POLARIS CF 100 100KVA/81KW	POLARIS CF 120 120KVA/108KW
Input	Three-phase + N		
Voltage	380-400-415 Vac		
Frequency	45 - 60 Hz (auto sensing)		
Power Factor	0,99		
THDi	< 2%		
Output	Three-phase + N		
Voltage	380-400-415 Vac		
Frequency	45 - 60 Hz (+/- 0,1%)		
Power Factor	0,9	0,8	0,9
THDo	< 1% (linear load) - <3% (non linear load)		
Efficiency	> 97,5%	> 97,5%	> 97,5%
Overload	Normal op: 110% 60' - 125% 10' - 150% 1' - >150% switch to bypass		
Self Test	Automatic self test at switch on		
Display	LCD: Voltage IN/OUT - Frequency IN/OUT - Load - Battery Voltage Operating Temp. - Overload - Failure - Alarms		
Interface	USB - RS485 - Clean Contacts- Intelligent slot		
Communication	SNMP (optional) - MODBUS (optional) - RELAY card (optional)		
Temperature	Operating: 0° + 40° / Storage: -25° + 55°		
Dimensions (WxHxD)	250x868x828 mm	750x868x828 mm	500x868x828 mm
N. of units	1	3	2

MODEL POWER	POLARIS CF 160 160KVA/144KW	POLARIS CF 180 180KVA/144KW	POLARIS CF 200 200KVA/160KW
Input	Three-phase + N		
Voltage	380-400-415 Vac		
Frequency	45 - 60 Hz (auto sensing)		
Power Factor	0,99		
THDi	< 2%		
Output	Three-phase + N		
Voltage	380-400-415 Vac		
Frequency	45 - 60 Hz (+/- 0,1%)		
Power Factor	0,9	0,8	0,8
THDo	< 1% (linear load) - <3% (non linear load)		
Efficiency	> 97,5%	> 97,5%	> 97,5%
Overload	Normal op: 110% 60' - 125% 10' - 150% 1' - >150% switch to bypass		
Self Test	Automatic self test at switch on		
Display	LCD: Voltage IN/OUT - Frequency IN/OUT - Load - Battery Voltage Operating Temp. - Overload - Failure - Alarms		
Interface	USB - RS485 - Clean Contacts- Intelligent slot		
Communication	SNMP (optional) - MODBUS (optional) - RELAY card (optional)		
Temperature	Operating: 0° + 40° / Storage: -25° + 55°		
Dimensions (WxHxD)	500x868x828 mm	750x868x828 mm	750x868x828 mm
N. of units	2	3	3



NAUTILUS

Three-phase on-line, double conversion UPS at 10KVA – 2,4MVA

The new Nautilus series take advantage of 19" rack modular architecture to provide high quality and high reliability solutions.



Each power module operates in "decentralized parallel" mode together with the others, and the complete system manage independently the input load.

Nautilus



When a single power module fails, then it is automatically shutdown (decentralized parallel mode) in order to guarantee a continuous operation by means of the remaining power modules

NAUTILUS

Three-phase on-line, double conversion UPS at 10KVA - 2,4MVA

Main advantages of using NAUTILUS series:

- High efficiency system, >95%, for lowering energy cost
- Centralized static switch for higher reliability
- Reduced time and cost for repairing and service


NAUTILUS series is suitable for application such as Data Center, Bank, Hospital, Airport, Industrial systems and Emergency lighting systems.

MAIN CHARACTERISTICS


- Input Power Factor 0,99
 - Input Harmonic Distortion <2%
 - Centralized LCD display to check all parameters related to each module in real time.
 - EPO function
 - Display LCD touch screen
- COMMUNICATION:
- 1x RS232 – 2x Rs485
 - 1x MODBUS PORT
 - 1x CLEAN CONTACTS
 - 2x COMMUNICATION SLOT
- The power module uses next generation DSP microprocessor to reduce the number of components and increase UPS reliability
 - The UPS automatically shares the load and use the centralizet switch to increase the reliability
 - Possibility of using a centralized battery connected to several UPS
 - Smart Battery recharge system: periodic battery test, checking of real recharge value, for increasing battery's lifetime



Display LCD touch screen

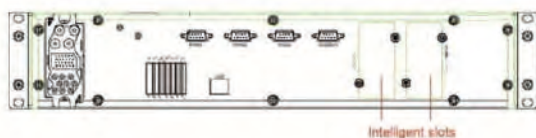

Communication ports

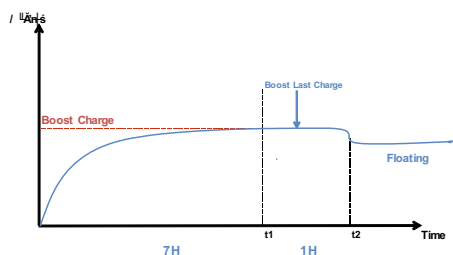

Battery recharging graph



NAUTILUS

Three-phase on-line, double conversion UPS at 10KVA - 2,4MVA

Model		Nautilus 10	Nautilus 15	Nautilus 20	Nautilus 30
Input		10kVA/9kW	15kVA/13,5kW	20kVA/16kW	30kVA/27kW
Phase				3ph + n	
Nominal Voltage				380/400/415	
Voltage range				208-478	
Frequency range				40-70Hz	
Power Factor				>/= 0,99	
Harmonic distortion				<2%	
Output					
Phase				3f + n	
Nominal voltage				380/400/415	
Power Factor				0,9	
Voltage tolerance				(+/- 2%)	
Frequency tolerance (normal op.)				(+/-1/2/4/5/10%)	
Frequency tolerance (battery op.)				50-60+0,2Hz	
Crest factor				3 :1	
THD				<2%	
Waveform				Sinusoidal	
Battery					
Battery charger		da 5,7 - 25A	da 5,7 - 25A	da 5,7 - 25A	da 5,7 - 25A
Dimensions (WxHxD)	mm	600x1400x860	600x1400x860	600x1400x860	600x1400x860
Weight	kg	123	126	127	156

Model		Nautilus 40	Nautilus 50	Nautilus 60	Nautilus 80
Input		40kVA/36kW	50kVA/45kW	60kVA/54kW	80kVA/72kW
Phase				3ph + n	
Nominal Voltage				380/400/415	
Voltage range				208-478	
Frequency range				40-70Hz	
Power Factor				>/= 0,99	
Harmonic distortion				<2%	
Output					
Phase				3f + n	
Nominal voltage				380/400/415	
Power Factor				0,9	
Voltage tolerance				(+/- 2%)	
Frequency tolerance (normal op.)				(+/-1/2/4/5/10%)	
Frequency tolerance (battery op.)				50-60+0,2Hz	
Crest factor				3 :1	
THD				<2%	
Waveform				Sinusoidal	
Battery					
Battery charger		da 5,7 - 25A	da 5,7 - 25A	da 5,7 - 25A	da 5,7 - 25A
Dimensions (WxHxD)	mm	600x1400x860	600x1400x860	600x1400x860	600x2000x850
Weight	kg	158	186	189	195

NAUTILUS

Three-phase on-line, double conversion UPS at 10KVA - 2,4MVA



Model	Nautilus 100	Nautilus 120	Nautilus 160	Nautilus 200
Input	100kVA/90kW	120kVA/108kW	160kVA/144kW	200kVA/180kW
Phase	3ph + n			
Nominal Voltage	380/400/415			
Voltage range	208-478			
Frequency range	40-70Hz			
Power Factor	≥ 0,99			
Harmonic distortion	<2%			
Output				
Phase	3f + n			
Nominal voltage	380/400/415			
Power Factor	0,9			
Voltage tolerance	(+/- 2%)			
Frequency tolerance (normal op.)	(+/- 1/2/4/5/10%)			
Frequency tolerance (battery op.)	50-60±0,2Hz			
Crest factor	3 :1			
THD	<2%			
Waveform	Sinusoidal			
Battery				
Battery charger	25A	30A	38A	50A
Dimensions (WxHxD)	mm 600x2000x850	600x2000x850	600x2000x850	600x2000x850
Weight	kg 286	316	350	380

Model	Nautilus 300	Nautilus 400	Nautilus 500
Input	300kVA/270kW	400kVA/360kW	500kVA/450kW
Phase	3ph + n		
Nominal Voltage	380/400/415		
Voltage range	208-478		
Frequency range	40-70Hz		
Power Factor	≥ 0,99		
Harmonic distortion	<2%		
Output			
Phase	3f + n		
Nominal voltage	380/400/415		
Power Factor	0,9		
Voltage tolerance	(+/- 2%)		
Frequency tolerance (normal op.)	(+/- 1/2/4/5/10%)		
Frequency tolerance (battery op.)	50-60±0,2Hz		
Crest factor	3 :1		
THD	<2%		
Waveform	Sinusoidal		
Battery			
Battery charger	80A	100A	130A
Dimensions (WxHxD)	mm 600x2000x850	600x2000x850	1200x2000x850
Weight	kg 600	815	860

NOTE: Scalability up to 2,4MVA



VOLTAGE STABILIZER

Single-phase stabilizer

Electronic voltage stabilizer SEM and SET series are designed for a continuous service, providing maximum reliability and requiring minimum maintenance.

Application: SOHO, lighting system, industrial equipment, telecommunication system, medical appliance.

Main features: very quick intervention time, high efficiency (98%), no harmonic distortion, no micro-interruption of output voltage, load variation from zero to 100%, any power factor of the load.

Option available: model with Input voltage 90V ÷ 290V (or 155V ÷ 500V) and Output voltage 230V (or 400V) ± 5%

Code SEM 01 SEM 02 SEM 03 SEM 04 SEM 05 SEM 06 SEM 07

Technical Requirements

Power KVA (Cosfi 0,8)		1	2	3	4	5	7,5	10
Input Voltage V	V	230 -30% +20%						
Input Frequency Hz	Hz	50						
Output Voltage V	V	230 ± 3%						
Waveform	Hz	sinusoidal						

Dimensions and Weight

Dimensions (WxHxD)	mm	310x310x180					270x460x450	
Weight	kg	11	16	18	20	22	37	45

Codice SEM 08 SEM 09 SEM 10 SEM 11 SEM 12 SEM 13 SEM 14

Technical Requirements

Power KVA (Cosfi 0,8)		15	20	25	30	40	50	75
Input Voltage V	V	230 -30% +20%						
Input Frequency Hz	Hz	50						
Output Voltage V	V	230 ± 3%						
Waveform	Hz	sinusoidal						

Dimensions and Weight

Dimensions (WxHxD)	mm	270x460x450		310x520x520			600x1050x400	
Weight	kg	63	90	115	135	180	210	350



VOLTAGE STABILIZER

Three-phase stabilizer

Code SET 01 SET 02 SET 03 SET 04 SET 05 SET 06 SET 07

Technical Requirements

Power KVA (Cosfi 0,8)		3	5	7,5	10	15	20	25
Input Voltage V	V	400 -30% +20%						
Input Frequency Hz	Hz	50						
Output Voltage V	V	400 ± 3%						
Waveform	Hz	sinusoidal						

Dimensions and Weight

Dimensions (WxHxD)	mm	400x650x200		500x750x250		350x800x790		
Weight	kg	35	43	53	62	78	100	110

Codice SET 08 SET 09 SET 10 SET 11 SET 12 SET 13 SET 14

Technical Requirements

Power KVA (Cosfi 0,8)		30	40	50	60	75	100	150
Input Voltage V	V	400 -30% +20%						
Input Frequency Hz	Hz	50						
Output Voltage V	V	400 ± 3%						
Waveform	Hz	sinusoidal						

Dimensions and Weight

Dimensions (WxHxD)	mm	350x800x790		500x700x1250			700x1400x900	
Weight	kg	120	170	220	270	300	500	500

BATTERIES

Sealed lead-acid 12V 5Ah-200Ah



Maintenance-free, sealed lead-acid batteries produced by Elsisit.

Compatible with most of the UPS devices.

Available from 5Ah to 200Ah capacity.

Elsist batteries are manufactured to withstand long and deep discharge. Packed in a box suitable for safe deliveries.



Code	Voltage	Capacity	Dimensions LxWxH	Weight
------	---------	----------	---------------------	--------

E.BT005	12V	4,5Ah	90x70x101mm	1,66kg
E.BT007	12V	7Ah	151x65x95mm	2,26kg
E.BT009	12V	9Ah	151x65x95mm	2,51kg
E.BT012	12V	12Ah	151x65x95mm	3,56kg
E.BT018	12V	18Ah	181x77x167,5mm	5,35kg
E.BT024	12V	24Ah	165x125x175mm	8,5kg
E.BT027	12V	27Ah	165x125x175mm	9,3kg
E.BT035	12V	33Ah	195x130x164mm	10,5kg
E.BT040	12V	40Ah	197x165x170mm	12,2kg
E.BT055	12V	55Ah	239x132x205mm	15,3kg
E.BT065	12V	65Ah	348x167x178mm	20,2kg
E.BT070	12V	70Ah	348x167x178mm	21,6kg
E.BT080	12V	80Ah	260x170x211mm	23,6kg
E.BT0100	12V	100Ah	330x171x215mm	29,0kg
E.BT0120	12V	120Ah	410x176x224mm	33,5kg
E.BT0150	12V	150Ah	482x170x240mm	44,8kg
E.BT0200	12V	200Ah	522x238x223mm	59,1kg



BATTERY CABINET

Metal cabinet for sealed lead acid batteries

Elsist provides a metal cabinet with hinged door and revolving handle with key, built according to the current European standards (CE) and EN 60439-1, EN 62040-1 standards and suitable to contain sealed lead batteries according to EN 50272- 2.

The degree of protection is IP20 (according to IEC 60529).

The cabinet is compatible with all Elsist UPS systems and can contain different types of batteries.

For example, up to 40 x 100Ah batteries can be installed.

If required, the cabinet can be completed with an input switch / breaker sized according to the system power

Code	Dimensions (WxDxH)
BB 3-Phase	1000 x 800 x 1800 mm
BBT12U	190 x 460 x 330mm
BBT40U	250 x 600 x 615mm
BBT80U	250 x 830 x 865mm
BBR12U	440 x 690 x 88mm



WHY USE AN ELSIST UPS?

THE ANSWER TO SOME FREQUENTLY ASKED QUESTIONS.

WHY THE QUALITY OF ELECTRICAL NETWORKS IS A PROBLEM?

In the "digital era", the increase in the use of telecommunications and IT infrastructures, which are much more sensitive to electrical disturbances compared to equipment of the past, highlights the importance of having a "clean" electricity supply network in order to avoid equipment breakdowns and interruption of services, with loss of data and increase of financial costs due to such interruptions. Often these disturbances are not detected but they can damage components of equipment without being able to understand the reasons. Because of that it is important to protect the systems from all sources of power supply disturbance

CAN I USE VOLTAGE STABILIZERS OR FILTERED AND PROTECTED SOCKETS INSTEAD OF A UPS TO PROTECT MY EQUIPMENT?

Voltage stabilizers or protected sockets can be used but still represent a partial solution. Compared to these devices, a UPS in addition filters and adjusts the mains voltage providing a "clean" output voltage, and also offers protection against network failures, continuing to operate thanks to its own batteries. A feature that neither stabilizers nor filtered outlets can offer.

IF I USE A GENSET, AM I SUFFICIENTLY PROTECTED?

No, a generator does not fully protect the load from disturbances in the electricity grid. This is because the generator takes a significantly long time (even a few minutes) to start up and go to full capacity. For this reason, a UPS is necessary to ensure that the connected devices can normally be supplied within the period of time between the interruption of the electricity grid and the start-up of the generator set. Elsis UPSs are compatible with generator set of different brands.

WHAT POWER CAPABILITY SHOULD HAVE MY UPS?

First of all, the total amount of the load to be protected must be calculated (in Watts). The power absorbed by the single device can be found on its technical data sheet or on the label affixed to the equipment itself. Once the total power has been calculated, select the UPS by adding a margin of about 25% (e.g. if the total load is 800W, then select a 1000W UPS). In this way a margin is guaranteed in case of further addition of equipment, and moreover, the UPS is not always operated at its maximum power, increasing its reliability.

HOW MANY AUTONOMY TIME MUST I GUARANTEE?

The back-up time guaranteed by the battery may vary depending on the type of device and application protected by the UPS. It may be only the time necessary to carry out a shutdown procedure, or a few minutes to allow a generator to start-up, or a few hours if you feed a system located in a remote place, that is difficult to access. It is advisable to dimension the back-up time and the number of batteries in an optimal way with respect to the specific needs, also taking into account the degradation of the batteries over time, in order to avoid unnecessary costs.

ELSIST MAY OFFER....

A full product range

High-tech and cutting-edge systems.

Systems with high efficiency and high reliability to lower the total cost of ownership

Modularity, to optimize the dimensioning of the power supply architecture

Easy to maintain devices

Pre-sales support

Short leadtime

Efficient Technical assistance service

Innovative and eco-friendly energy

INDEX

WHAT IS AN UPS?	18
HOT IT WORKS	19
ELECTRICAL DISTURBANCES	20
TECHNICAL SERVICE	22
MULTISTATION	25
NEMO2.0	26
PURE	27
MISSION	28
MISSION UPS	29
MISSION MT	30
MISSION MSS	31
MISSION CF	34
RACK LINE	33
UPSERVER2.0	34
FLEXIBILE	35
TRI-ONE	37
TRI-ONE UPS	37
TRI-ONE TMSS	38
TRI-ONE CF	39
SIRIUS	40
POLARIS	41
POLARIS UPS	44
POLARIS PSS	46
POLARIS CF	48
NAUTILUS	50
VOLTAGE STABILIZER	54
BATTERIES	55
BATTERY CABINET	56
FAQ	57





Avenida Valdelaparra, 27 - Nave 12
28108 Alcobendas - Madrid (España)

+34 699 700 337

bw.corporate@b-wspain.com
www.b-wspain.com

BW reserves the right to make changes at any time without notice, due to any technological improvements.
Data and characteristics are purely indicative and not binding.